



Open Metering System **Conformance Test**

Volume 5 **Use Cases**

Issue 1.0.3 / 2024-07-04

Release

Document History

Version	Date	Comment	Editor
0.0.1	2021-09-23	First draft	AG3, A. Reissinger
0.0.2	2022-01-24	AG1 comments integrated	AG3, A. Reissinger
0.0.3	2022-03-10	AG1 comments integrated	AG3, A. Reissinger
0.0.4	2022-05-17	AG1 comments integrated	AG3, A. Reissinger
0.0.5	2022-08-11	AG1 comments integrated Copyright remark added to front page	AG3, A. Reissinger
0.0.6	2022-08-17	Chapter 4.9 removed	A. Reissinger
0.0.7	2022-11-15	Table 6 changed Chapter 4.2.2.1 changed Chapter 4.4 revised Chapter 4.5 added	AG3, A. Reissinger
1.0.0	2023-01-17 and 2023-01-23	Chapter 4.4.1 changed Release candidate	AG3, A. Reissinger
1.0.1	2023-03-06 and 2023-03-21	Consideration of comments Final editing in meeting #89 Release	AG3, A. Reissinger
1.0.2	2023-05-25 and 2024-01-29 and 2024-05-16 and 2024-05-18	Chapter 4.2.1.3.4 created Chapter 4.6 created: Test cases for UC-05 Chapter 4.10 created: Test cases for UC-12a Chapter 4.11 created: Test cases for UC-12b Chapter 4.12 created: Test cases for UC-14 Correction of test case [T31-FAC1] Release candidate	Michael Rac AG1, AG3, A. Reissinger AG3 A. Reissinger
1.0.3	2024-06-28 and 2024-07-04	Consideration of review comments Release	AG3, A. Reissinger

Contents

	Document History.....	2
	Contents.....	3
	Tables	6
5	Figures	7
	1 Scope	8
	2 References	9
	3 Definitions, Symbols and Abbreviations	10
	4 Test Cases	11
10	4.1 Introduction	11
	4.2 Test Cases for UseCase 00 (UC-00).....	11
	4.2.1 [OMS-CT3.DLL] Addition.....	11
	4.2.1.1 Test of Response Time	11
	4.2.1.1.1 [T31-RT01] Slow Response Time	11
15	4.2.1.1.2 [T31-RT02] Fast Response Time	11
	4.2.1.1.3 [T31-RSP03] Response Time Switch	11
	4.2.1.1.4 Response Time for Test Cycles	11
	4.2.1.2 Frequent Access Cycle	12
	4.2.1.2.1 [T31-FAC1] Frequent Access Cycle Timing	13
20	4.2.1.2.2 [T31-FAC2] Frequent Access Cycle Timing Extension	14
	4.2.1.3 Communication sequences.....	15
	4.2.1.3.1 [T31-CS1] Communication sequence Seq_SND-UD	15
	4.2.1.3.2 [T31-CS2] Communication sequence Seq_SND-UD2	16
	4.2.1.3.3 [T31-CS3] Communication sequence REQ-UD1	17
25	4.2.1.3.4 [T31-CS4] Communication sequence test AFL MCR	18
	4.2.1.3.5 Communication sequence for test procedure.....	18
	4.2.1.4 Application Security	19
	4.2.1.4.1 [T43-ASP01] Test of Application Security Profile 01	19
	4.2.1.4.2 [T43-ASP03] Test of Application Security Profile 03	19
30	4.2.1.4.3 [T43-ASP02] Test of Application Security Profile 10	20
	4.2.1.4.3.1 [T43-ASP02-01] Test of Application Security Profile 10 – Acceptance.....	20
	4.2.1.4.3.2 [T43-ASP02-02] Test of Application Security Profile 10 - Key Error	20
	4.2.1.4.3.3 [T43-ASP02-03] Test of Application Security Profile 10 – Frame Manipulation	21
	4.2.1.4.3.4 [T43-ASP03] Test of Application Security Profile 20	21
35	4.2.2 [OMS-CT4.APL] Addition	22
	4.2.2.1 Check OMS UseCase 00	22
	4.2.2.2 Test for Command Response	23
	4.2.2.2.1 [T43-UC00-1] Test for Command with no Specific Response	23
	4.2.2.2.2 [T43-UC00-2] Test for Command with Short Response	24
40	4.2.2.2.3 [T43-UC00-3] Test for Command with Long Response	25
	4.2.2.2.4 [T43-UC00-4] Test for Test Command Long	26
	4.2.2.3 Error Response.....	27
	4.2.2.3.1 [T43-UC00-5] Test for Error Response	27
	4.3 Test Case for UseCase 01 (UC-01) - [OMS-CT4.APL] Addition	28
45	4.3.1 Introduction	28
	4.3.2 [T44-UC01-1] Test Meter Registration	28
	4.4 Test Cases for UseCase 03 (UC-03) - [OMS-CT4.APL] Addition	29
	4.4.1 Introduction	29
	4.4.2 [T60-UC03-0] Test for Radio Content	29
50	4.4.3 Basic Communication Tests	30

	4.4.3.1	[T60-UC03-10] Test for Basic Communication Precondition.....	30
	4.4.3.2	[T60-UC03-11] Test for Basic Usage of Subunit.....	31
	4.4.3.3	[T60-UC03-12] Test for wrong usage of Subunit.....	32
	4.4.4	Tests for Type “Direct switch-on”	33
5	4.4.4.1	[T60-UC03-20] Test for Open/Connect for Type “Direct switch-on”	33
	4.4.4.2	[T60-UC03-21] Test for Open/Connected Loop for Type “Direct switch-on”	34
	4.4.4.3	[T60-UC03-22] Test for Close/Disconnect for Type “Direct switch-on”	35
	4.4.4.4	[T60-UC03-23] Test for Close/Disconnect Loop for Type “Direct switch-on”	36
	4.4.5	Tests for Type “Manual switch-on”	37
10	4.4.5.1	[T60-UC03-30] Test for Open/Connect for Type “Manual switch-on”	37
	4.4.5.2	[T60-UC03-31] Test for Release for Type “Manual switch-on”	38
	4.4.5.3	[T60-UC03-32] Test for Manual Action for Type “Manual switch-on”	39
	4.4.5.4	[T60-UC03-33] Test for Open/Connected Loop for Type “Manual switch-on”	40
	4.4.5.5	[T60-UC03-34] Test for Released Loop for Type “Manual switch-on”	41
15	4.4.5.6	[T60-UC03-35] Test for Close/Disconnect for Type “Manual switch-on”	42
	4.4.5.7	[T60-UC03-36] Test for Close/Disconnect Loop for Type “Manual switch-on”	43
	4.4.6	Tests for ASP10	44
	4.4.6.1	[T60-UC03-40] Test for Unsecure Communication (without ASP10)	44
	4.4.6.2	[T60-UC03-41] Test for other Application Security Communication (e.g. with ASP1)	45
20	4.4.6.3	[T60-UC03-42] Test for wrong Settings of Security Communication (e.g. with ASP1)	46
	4.4.6.4	[T60-UC03-43] Test for Target Time in ASP10	47
	4.4.6.5	[T60-UC03-44] Test for Unsupported Target Time in ASP10.....	48
	4.5	Test Cases for UseCase 04 (UC-04) - [OMS-CT4.APL] Addition	49
	4.5.1	[T43-UC04-1] OMS-UC-04 a/b/c: Read Time	49
25	4.5.2	[T43-UC04-2] OMS-UC-04 a/b: Adjust and Correct Clock Time by Gateway	50
	4.5.3	[T43-UC04-3] OMS-UC-04b/c: Adjust Clock Time by Head-End.....	52
	4.5.4	[T43-UC04-4] OMS-UC-04b/c: Set Date and Time by Head-End.....	55
	4.6	Test Cases for UseCase 05 (UC-05) - [OMS-CT4.APL] Addition	56
	4.6.1	Introduction.....	56
30	4.6.2	Phase 1 – Tests for Transfer Preparation	57
	4.6.2.1	[T60-UC05-01] Test for successful preparation	57
	4.6.2.2	[T60-UC05-02] Test for unsuccessful terminated preparation by identifier	58
	4.6.2.3	[T60-UC05-03] Test for unsuccessful terminated preparation by bit.....	59
	4.6.2.4	[T60-UC05-04] Test for terminated transfer	60
35	4.6.2.5	[T60-UC05-05] Test for unsuccessful preparation	61
	4.6.3	Phase 2 – Image Transfer.....	62
	4.6.3.1	[T60-UC05-20] Test for terminated transfer preparation	62
	4.6.3.2	[T60-UC05-21] Test for Transfer Completion without Blocks	63
	4.6.3.3	[T60-UC05-22] Test for Transfer SND_UD and REQ_UD2	63
40	4.6.3.4	[T60-UC05-23] Test for Transfer Completion after first block.....	65
	4.6.3.5	[T60-UC05-24] Test for terminated transfer	65
	4.6.3.6	[T60-UC05-25] Test for Transfer remaining blocks	67
	4.6.3.7	[T60-UC05-26] Test for successful Transfer Completion	68
	4.6.4	Phase 3 – Image Validation	68
45	4.6.4.1	[T60-UC05-40] Test for successful image validation.....	68
	4.6.4.2	[T60-UC05-41] Test for unsuccessful image validation.....	71
	4.6.4.3	[T60-UC05-42] Test for unsuccessful termination of image transfer	72
	4.6.4.4	[T60-UC05-43] Test for termination of image validation.....	73
	4.6.5	Phase 4 – Image Validation	74
50	4.6.5.1	[T60-UC05-60] Test for successful image validation.....	74
	4.7	Test Cases for UseCase 06 (UC-06) - [OMS-CT4.APL] Addition	76

	4.7.1	Introduction	76
	4.7.2	Standard Response	76
	4.7.2.1	Introduction	76
	4.7.2.2	[T43-UC06-1] Test for Get Status Information	77
5	4.7.2.3	[T43-UC06-2] Test for Clear Status Information Bitwise	78
	4.7.2.4	[T43-UC06-3] Test for Clear Status Information all	79
	4.8	Test Cases for UseCase 07 (UC-07)	80
	4.9	Test Cases for UseCase 08 (UC-08) - [OMS-CT4.APL] Addition	81
	4.9.1	Introduction	81
10	4.9.2	Get List of Active Keys	82
	4.9.2.1	[T43-UC08-1] Test for Active Key Information	82
	4.9.2.2	[T43-UC08-2] Test for Active Keys and Key Counter Information	83
	4.9.3	Transfer of Key Material	84
	4.9.3.1	[T43-UC08-3] Test for Transfer of Key Material (Master Key)	84
15	4.9.3.2	[T43-UC08-4] Test for Transfer of Key Material (Application Security Key)	85
	4.9.4	Activation/Deactivation of Key Material	86
	4.9.4.1	[T43-UC08-5] Test for Activation/Deactivation of Key Material (Master Key)	86
	4.9.4.2	[T43-UC08-6] Test for Activation/Deactivation of Key Material (Application Security Key)	87
	4.10	Test Cases for UseCase 12a (UC-12a) - [OMS-CT4.APL] Addition	89
20	4.10.1	Introduction	89
	4.10.2	[T60-UC12a-0] Test to get last due date	89
	4.10.3	[T60-UC12a-1] Test to set next due date with valid date	90
	4.10.4	[T60-UC12a-2] Test to set next due date with invalid date	91
	4.10.5	[T60-UC012a-3] Test to get next due date	92
25	4.11	Test Cases for UseCase 12b (UC-12b) - [OMS-CT4.APL] Addition	93
	4.11.1	Introduction	93
	4.11.2	[T60-UC12b-0] Test to get ownership number	93
	4.11.3	[T60-UC12b-1] Test to set ownership number	94
	4.11.4	[T60-UC12b-2] Test to set ownership number with invalid value	95
30	4.12	Test Cases for UseCase 14 (UC-14) - [OMS-CT5.UC]	96
	4.12.1	Introduction	96
	4.12.2	[T1-UC14-0] Test to remove data-point from readout-list	97
	4.12.3	[T1-UC14-1] Test to add data point to readout-list	98
	4.12.4	[T1-UC14-2] Test to add and delete unimplemented data point to/from readout-list ..	99

35

Tables

	Table 1 – [T31-FAC1] Frequent Access Cycle Timing	13
	Table 2 – [T31-FAC2] Frequent Access Cycle Timing Extension.....	14
	Table 3 – [T31-CS1] Communication sequence Seq_SND-UD	15
5	Table 4 – [T31-CS2] Communication sequence Seq_SND-UD2	16
	Table 5 – [T31-CS3] Communication sequence Seq_REQ-UD1	17
	Table 6 – [T31-CS4] Communication sequence test AFL MCR	18
	Table 7 – Application security	19
	Table 8 – [T43-ASP02-01] Test of Application security profile 10 – acceptance	20
10	Table 9 – [T43-ASP02-02] Test of Application security profile 10 - key error	20
	Table 10 – [T43-ASP02-03] Test of Application security profile 10 – frame manipulation	21
	Table 11 – [T43-UC00-1] Test for command with no specific response	23
	Table 12 – [T43-UC00-2] Test for command with short response	24
	Table 13 – [T43-UC00-3] Test for command with long response	25
15	Table 14 – [T43-UC00-4] Test for test command long	26
	Table 15 – [T43-UC00-5] Test for Error Response	27
	Table 16 – [T44-UC01-1] Test Meter Registration	28
	Table 17 – [T60-UC03-0] Test for radio content	29
	Table 18 – [T60-UC03-10] Test for basic communication precondition.....	30
20	Table 19 – [T60-UC03-11] Test for basic usage of subunit.....	31
	Table 20 – [T60-UC03-12] Test for wrong usage of Subunit.....	32
	Table 21 – [T60-UC03-20] Test for open/connect for type “Direct switch-on”	33
	Table 22 – [T60-UC03-21] Test for open/connected loop for type “Direct switch-on”	34
	Table 23 – [T60-UC03-22] Test for close/disconnect for type “Direct switch-on”	35
25	Table 24 – [T60-UC03-23] Test for close/disconnect loop for type “Direct switch-on”	36
	Table 25 – [T60-UC03-30] Test for open/connect for type “Manual switch-on”	37
	Table 26 – [T60-UC03-31] Test for release for type “Manual switch-on”	38
	Table 27 – [T60-UC03-32] Test for manual action for type “Manual switch-on”	39
	Table 28 – [T60-UC03-33] Test for open/connected loop for type “Manual switch-on”	40
30	Table 29 – [T60-UC03-34] Test for released loop for type “Manual switch-on”	41
	Table 30 – [T60-UC03-35] Test for close/disconnect for type “Manual switch-on”	42
	Table 31 – [T60-UC03-35] Test for close/disconnect loop for type “Manual switch-on”	43
	Table 32 – [T60-UC03-40] Test for unsecure communication (without ASP10)	44
35	Table 33 – [T60-UC03-41] Test for other application security communication (e.g. with ASP1)	45
	Table 34 – [T60-UC03-42] Test for wrong settings of security communication (e.g. with ASP1)	46
	Table 35 – [T60-UC03-43] Test for target time in ASP10.....	47
	Table 36 – [T60-UC03-44] Test for unsupported target time in ASP10	48
40	Table 37 – [T60-UC04-1] OMS-UC-04 a/b/c: Read Time.....	49
	Table 38 – [T60-UC04-2] OMS-UC-04 a/b: Adjust and Correct Clock Time by Gateway	50
	Table 39 – [T60-UC04-3] OMS-UC-04b/c: Adjust Clock Time by Head-End.....	52
	Table 40 – [T60-UC04-4] OMS-UC-04b/c: Set Date and Time by Head-End.....	55
	Table 41 – [T60-UC05-01] Test for successful preparation.....	57
45	Table 42 – [T60-UC05-02] Test for unsuccessful terminated preparation by identifier	58

	Table 43 – [T60-UC05-03] Test for unsuccessful terminated preparation by bit.....	59
	Table 44 – [T60-UC05-04] Test for terminated transfer	60
	Table 45 – [T60-UC05-05] Test for unsuccessful preparation.....	61
	Table 46 – [T60-UC05-20] Test for terminated transfer preparation	62
5	Table 47 – [T60-UC05-21] Test for Transfer Completion without Blocks	63
	Table 48 – [T60-UC05-22] Test for Transfer SND_UD and REQ_UD2.....	63
	Table 49 – [T60-UC05-23] Test for Transfer Completion after first block	65
	Table 50 – [T60-UC05-24] Test for terminated transfer	65
	Table 51 – [T60-UC05-25] Test for Transfer remaining blocks	67
10	Table 52 – [T60-UC05-26] Test for successful Transfer Completion.....	68
	Table 53 – [T60-UC05-40] Test for successful image validation	68
	Table 54 – [T60-UC05-41] Test for unsuccessful image validation	71
	Table 55 – [T60-UC05-42] Test for unsuccessful termination of image transfer.....	72
	Table 56 – [T60-UC05-43] Test for termination of image validation	73
15	Table 57 – [T60-UC05-60] Test for successful image validation	74
	Table 58 – [T43-UC06-1] Test for get status information	77
	Table 59 – [T43-UC06-2] Test for clear status information bitwise.....	78
	Table 60 – [T43-UC06-3] Test for clear status information all	79
	Table 61 – [T43-UC08-1] Test for active key information.....	82
20	Table 62 – [T43-UC08-2] Test for active keys and key counter information	83
	Table 63 – [T43-UC08-3] Test for transfer of key material (Master key)	84
	Table 64 – [T43-UC08-4] Test for transfer of key material (Application security key).....	85
	Table 65 – [T43-UC08-5] Test for activation/deactivation of key material (Master key).....	86
25	Table 66 – [T43-UC08-6] Test for activation/deactivation of key material (Application security key)	87
	Table 67 – [T60-UC12a-0] Test to get last due date	89
	Table 68 – [T60-UC12a-1] Test to set next due date with valid date.....	90
	Table 69 – [T60-UC12a-2] Test to set next due date with invalid date	91
	Table 70 – [T60-UC12a-3] Test to get next due date	92
30	Table 71 – [T60-UC12b-0] Test to get ownership number	93
	Table 72 – [T60-UC12b-1] Test to set ownership number	94
	Table 73 – [T1-UC14-0] Test to remove data-point from readout-list	97
	Table 74 – [T1-UC14-1] Test to add data point to readout-list	98
35	Table 75 – [T1-UC14-2] Test to add and delete unimplemented data point to/from readout-list	99

Figures

Figure 1 – Frequent Access Cycle for mode T.....	12
--	----

1 Scope

The present document is part of the Conformance Test Specification used for certification of equipment according to the Open Metering System (OMS) specification.

This issue is applicable only together with [OMS-CT1.GP].

- 5 This document specifies the tests to show conformance for the Use Cases which are defined in OMS Specification Volume 2, Primary Communication [OMS-S2], Annex M, Release A.

The parameters to be tested, and the test limits are based on OMS Specification Volume 2, Primary Communication [OMS-S2] including Annex M, Release A and the referenced Wireless M-Bus specification [EN 13757-4].

- 10 **NOTE:** This version of test specification does not cover all items of the current OMS Specification.

It is not in the scope of this document to show conformance to the essential requirements of any relevant EU directive, e. g. the Radio Equipment Directive 2014/53/EU (RED), or other national or international standards.

2 References

The references used are listed in [OMS-CT1.GP]:

[OMS-CT1.GP] OMS Open Metering System – Conformance Test Volume 1 – General Part; Issue 4.0.11 / 2024-07-04

3 Definitions, Symbols and Abbreviations

The term definitions, symbols and abbreviations used are defined in [OMS-CT1.GP] (OMS Open Metering System – Conformance Test Volume 1 – General Part).

4 Test Cases

4.1 Introduction

This chapter describes the test procedures for the OMS-UseCases as defined in [OMS-S2], Annex M, Release A.

- 5 If the Manufacturer declares the implementation of an OMS-UseCase in the [OMS-CT-ManDec] the described Test cases have to be passed successfully for achievement of OMS Conformity.

4.2 Test Cases for UseCase 00 (UC-00)

4.2.1 [OMS-CT3.DLL] Addition

10 4.2.1.1 Test of Response Time

The timing limits are depending on the radio mode T2, S2 and C2.

The implemented radio mode is declared in the [OMS-CT-ManDec] .

4.2.1.1.1 [T31-RT01] Slow Response Time

This test is mandatory for radio modes S2, T2, C2.

- 15 The following timing shall be tested:

Mode S2:	3,1 ms, 14,9 ms
Mode T2:	2,1 ms, 2,9 ms
Mode C2_slow:	999,6 ms, 1000,4 ms

- 20 The test is successfully **passed** if the DUT has processed the commands in the given timing window in 2 out of 2 communications, otherwise it is **failed**. This test case shall be integrated in the test case [T43-UC00-1].

4.2.1.1.2 [T31-RT02] Fast Response Time

This test is mandatory for radio mode C2.

For radio modes S2, T2 this test is not applicable.

- 25 The following timing shall be tested:

Mode C2_fast:	99,6 ms, 100,4 ms
---------------	-------------------

The test is successfully **passed** if the DUT has processed the commands in the given timing window in 2 out of 2 communications, otherwise it is **failed**. This test case shall be integrated in the test case [T43-UC00-1].

30 4.2.1.1.3 [T31-RSP03] Response Time Switch

This test is mandatory for radio mode C2.

For radio modes S2, T2 this test is not applicable.

The OMS-CT shall test the switching capability of response timing slow -> fast -> slow.

This test can be executed with a test case of the [OMS-UC00] described later.

- 35 The test is successfully **passed** if the DUT has processed the commands in the given timing window in 2 out of 2 communications, otherwise it is **failed**. This test case shall be integrated in the test case [T43-UC00-1].

4.2.1.1.4 Response Time for Test Cycles

- 40 All test sequences shall use the fast response timing for mode C2 and slow response timing for modes S2 and T2.

The OMS-CT shall transmit the messages to the DUT in the middle of the timing window.

NOTE: This not a test point. It is a precondition for the following tests.

4.2.1.2 Frequent Access Cycle

If the Manufacturer declares the implementation of an OMS-UseCase in the [OMS-CT-ManDec] the described Test cases have to be passed successful for achievement of OMS Conformity.

- 5 The principle is shown in Figure 1.

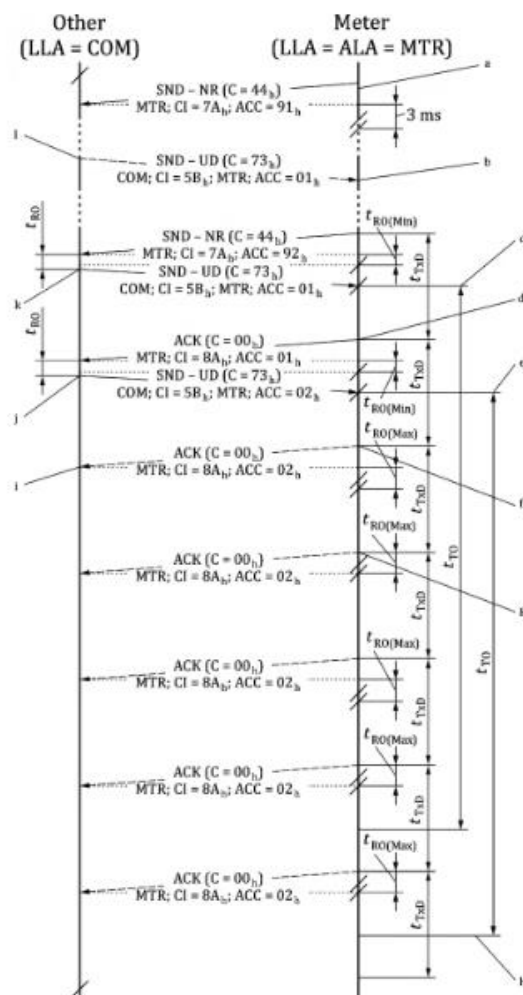


Figure 1 – Frequent Access Cycle for mode T

4.2.1.2.1 [T31-FAC1] Frequent Access Cycle Timing

Table 1 – [T31-FAC1] Frequent Access Cycle Timing

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall stimulate the DUT to enter FAC by sending 1 SND-UD with application reset 00h	
2	The OMS CT Tool shall receive all ACKs from the DUT and timestamp it	
3	The OMS CT Tool shall receive the ACKs from the DUT for min 25 s (t_TO)	
4	The OMS CT Tool shall not receive any ACK after 30 s. t_TO	
5	The OMS CT Tool shall evaluate that timing interval and deviation of the ACK messages.	
Test result		
1	<p>The Test [T31-FAC1] is successfully passed if</p> <ul style="list-style-type: none"> The interval of ACK messages (all measured t_TxD) is constant / within a deviation of $\pm 0,500$ ms. The measured time interval of ACK messages (t_TxD) is either 2, 3 or 5 s otherwise the test [T31-FAC1] is failed. 	

4.2.1.2.2 [T31-FAC2] Frequent Access Cycle Timing Extension

Table 2 – [T31-FAC2] Frequent Access Cycle Timing Extension

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall stimulate the DUT to enter FAC by sending 1 SND-UD with application reset 00h.	
2	The OMS CT Tool shall receive all ACKs from the DUT and timestamp it	
	The OMS CT Tool shall send 1 SND-UD with application reset 00h to the DUT	
	The OMS CT Tool shall receive all ACKs from the DUT and timestamp it	
	The OMS CT Tool shall send 1 SND-UD with application reset 00h to the DUT	
	The OMS CT Tool shall receive all ACKs from the DUT and timestamp it.	
3	The OMS CT Tool shall receive the ACK from the DUT for min 25 s (t_{TO}) after the last send message.	
4	The OMS CT Tool shall not receive and ACK after 30 s. t_{TO} after the last send message.	
5	The OMS CT Tool shall evaluate the timing interval and deviation of the ACK messages.	
Test result		
1	<p>The Test [T31-FAC2] is successfully passed if all conditions are positive</p> <ul style="list-style-type: none"> The interval of ACK messages (all t_{TxD}) is constant / within a deviation of ± 500 ms. The interval of ACK messages (t_{TxD}) is either 2, 3 or 5 s. <p>otherwise the test is failed</p>	

4.2.1.3 Communication sequences

The [OMS-S2] describes the communication sequences

- Seq_SND-UD (mandatory)
- Seq_SND-UD2 (optional)
- REQ-UD1 (mandatory)

This chapter describes the test procedures for this communication sequences. All applicable tests have to be passed.

4.2.1.3.1 [T31-CS1] Communication sequence Seq_SND-UD

This test is mandatory.

Table 3 – [T31-CS1] Communication sequence Seq_SND-UD

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	OMS CT Tool is receiving a telegram with bidi access enable	
2	OMS CT Tool send correct SND-UD with application reset 00h to the DUT	
3	OMS CT Tool is receiving the answer from the DUT Answer = ACK -> continue Answer = any other Frame -> Error No answer in 2x 5 sec -> Timeout -> Error	
4	OMS CT Tool is sending REQ-UD2 to the DUT	Only in case of no error
5	OMS CT Tool is receiving answer Answer = RSP-UD -> OK, Success of Test Answer = any other frame: Error No Answer in 2x5 sec -> Timeout -> Error	Only in case of no error
6	Send SND-NKE to the DUT and wait for SND-NR from the DUT	
7	In case of Error the test sequences (step 1..6) shall be repeated once	
Test result		
1	If at least one test sequence passed OK the test is successfully passed; otherwise failed.	

4.2.1.3.2 [T31-CS2] Communication sequence Seq_SND-UD2

The communication sequence Seq_SND-UD2 is optional.

If the manufacturer declares implementation of Seq_SND-UD2 in the [OMS-CT-ManDec] this test shall be passed.

5

Table 4 – [T31-CS2] Communication sequence Seq_SND-UD2

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	OMS CT Tool is receiving a telegram with bidi access enable	
2	OMS CT Tool send correct SND-UD2 with application reset 00h to the DUT	
3	OMS CT Tool is receiving the answer from the DUT Answer = RSP-UD -> success, OK! Answer = any other Frame -> Error No answer in 2x 5 sec -> Timeout -> Error	
4	Send SND-NKE to the DUT and wait for SND-NR from the DUT	
5	In case of Error the test sequences (step 1..4) shall be repeated	
Test result		
1	If at least one test sequence passed OK the test is successfully passed; otherwise failed.	

4.2.1.3.3 [T31-CS3] Communication sequence REQ-UD1

This test is mandatory.

Table 5 – [T31-CS3] Communication sequence Seq_REQ-UD1

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
Test sequence		
1	OMS CT Tool is receiving a telegram with bidi access enable	
2	OMS CT Tool send correct REQ-UD1 to the DUT	
3	OMS CT Tool is receiving the answer from the DUT	
Test result		
1	(Answer = ACK) or (Answer = AlarmProtocol) -> passed Otherwise failed	

4.2.1.3.4 [T31-CS4] Communication sequence test AFL MCR

This test is mandatory.

Table 6 – [T31-CS4] Communication sequence test AFL MCR

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall prepare the command “Test response short” ([OMS-S2], Annex M, table M.4) using <ul style="list-style-type: none"> defined security profile as declared in [OMS-CT-ManDec] defined application security if implemented, using KeyID 1Fh as declared in [OMS-CT-ManDec] The AFL MCR is inferior in comparison to the last received AFL MCR from the DUT 	
2	The OMS CT Tool shall send the command “Test response short” ([OMS-S2], Annex M, tables M.4 and M.6) to the DUT	Seq_SND-UDx (see [OMS-S2], Annex M) is used.
3	The OMS CT Tool shall receive the answer from the DUT	
4	The test sequence is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD The received data is not ‘42h 42h’ ([OMS-S2], Annex M, Table M.4) but the standard answer from the DUT 	
Test result		
1	The Test is successfully passed if step 4 was successful verified. otherwise the test is failed	

4.2.1.3.5 Communication sequence for test procedure

For Information only:

If the [OMS-CT-ManDec] declares that the DUT implements SND-UD2 then all remaining tests are conducted with SND-UD2, otherwise all remaining tests are conducted with SND-UD.

If the [OMS-CT-ManDec] declares the implementation of SND-UD2 and [T31-CS2] has failed all bidirectional tests are regarded as failed and no additional tests are executed.

4.2.1.4 Application Security

The [OMS-S2], 9.4 defines Application security with different profiles. The applicable Application secure profile (ASP) per UseCase is defined in [OMS-S2], Annex M.

Table 7 – Application security

ASP	OMS-UC-00	OMS-UC-01	OMS-UC-02	OMS-UC-03	OMS-UC-04	OMS-UC-05	OMS-UC-06	OMS-UC-07	OMS-UC-08	OMS-UC-09
ASP01	- ¹	-	-	-	-	-	-	-	M	-
ASP02	-	-	-	-	-	-	-	-	-	-
ASP03	- ¹	-	-	-	-	M	-	-	-	-
ASP04 to ASP09	-	Reserved								
ASP10	- ¹	-	-	M	- ² / M ³	M/O ⁴	M	-	-	-
ASP11 to ASP19	-	Reserved								
ASP20	-	-	-	-	-	-	-	-	-	-
- not applicable M mandatory O optional (depending on UC-05 details) 1 Availability based on implemented OMS-UC-01 ... OMS-UC-09 2 Only for OMS-UC-04a 3 Only for OMS-UC-04b & OMS-UC-04c 4 Depending on the messages										

- 5 If the manufacturer declares in the [OMS-CT-ManDec] the implementation of 1 or more UseCases that mandatory require the usage of an ASP or declared the optional usage of an ASP the related ASP shall be tested. This test is successfully **passed** if all applicable tests are passed.
Otherwise this test is failed.

10 4.2.1.4.1 [T43-ASP01] Test of Application Security Profile 01

This ASP is specific for OMS-UC-08 and therefore tested in the according UseCase.

4.2.1.4.2 [T43-ASP03] Test of Application Security Profile 03

This ASP is specific for OMS-UC-05 and therefore tested in the according UseCase.

4.2.1.4.3 [T43-ASP02] Test of Application Security Profile 10

4.2.1.4.3.1 [T43-ASP02-01] Test of Application Security Profile 10 – Acceptance

Table 8 – [T43-ASP02-01] Test of Application security profile 10 – acceptance

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS-CT shall prepare a command using the applicable Security Profile [OMS-CT-ManDec]	
2	The OMS-CT shall apply ASP10 to the command using KeyID = 1Fh [OMS-CT-ManDec]	
3	The OMS CT shall execute the [T43-UC00-1] successfully	
Test result		
1	If [T43-UC00-1] is passed this test is successfully passed Otherwise it is failed	

4.2.1.4.3.2 [T43-ASP02-02] Test of Application Security Profile 10 - Key Error

Table 9 – [T43-ASP02-02] Test of Application security profile 10 - key error

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS-CT shall prepare the test command “Empty or standard response” ([OMS-S2], Annex M, table M.4) using the applicable Security Profile [OMS-CT-ManDec]	
2	The OMS-CT shall apply ASP10 to the command using a key different to KeyID = 1Fh [OMS-CT-ManDec]	
3	The OMS CT shall send the test command to the DUT	
4	The OMS CT shall receive the replay from the DUT	
Test result		
1	If the replay of the DUT = ApplicationError with ErrorCode = 20h this test is successfully passed Otherwise it is failed	

4.2.1.4.3.3 [T43-ASP02-03] Test of Application Security Profile 10 – Frame Manipulation

Table 10 – [T43-ASP02-03] Test of Application security profile 10 – frame manipulation

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS-CT shall prepare the test command “Empty or standard response” ([OMS-S2], Annex M, table M.4) using the applicable Security Profile [OMS-CT-ManDec]	
2	The OMS-CT shall apply ASP10 to the command using <i>KeyID = 1Fh</i> [OMS-CT-ManDec]	
3	The generated payload shall be manipulated: Generate a test payload e.g. 5A MAC shall be calculated on original payload Manipulate payload by XOR0000100000....b (single bit error)	
4	The OMS CT shall send the test command to the DUT	
5	The OMS CT shall receive the replay from the DUT	
Test result		
1	If the replay of the DUT = ApplicationError with ErrorCode = 20h this test is successfully passed Otherwise it is failed	

4.2.1.4.3.4 [T43-ASP03] Test of Application Security Profile 20

5 Not required for this release.

4.2.2 [OMS-CT4.APL] Addition

4.2.2.1 Check OMS UseCase 00

The Implementation of OMS-UC-00 according [OMS-S2], Annex M is mandatory if at least one of the other bidirectional OMS UseCases are declared in the [OMS-CT-ManDec] .

5 For successful conformity test all test criteria's of this chapter have to be passed.

Special Information on DUT required for UC00 [OMS-CT-ManDec] :

- Applied security profile according [OMS-S2], Annex M, Table M.5
- Applied Encryption and Authentication [OMS-S2], Annex M, Table M.5
- Applied Application security (optional)
 - 10 ○ If Application security is applied: KeyID 1Fh

The following tests shall be executed to test the specific or unspecific response of DUT triggered by commands.

The timing of response is included in the error response test cases (see 4.2.1.1) and not explicit included here.

4.2.2.2 Test for Command Response

4.2.2.2.1 [T43-UC00-1] Test for Command with no Specific Response

This test is mandatory.

Table 11 – [T43-UC00-1] Test for command with no specific response

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall prepare the command “Empty or standard response” ([OMS-S2], Annex M, table M.4) using <ul style="list-style-type: none"> defined security profile as declared in [OMS-CT-ManDec] defined application security if implemented, using KeyID 1Fh as declared in [OMS-CT-ManDec] 	
2	The OMS CT Tool shall send the command “Empty or standard response” ([OMS-S2], Annex M, table M.4) to the DUT	Seq_SND-UDx (see [OMS-S2], Annex M) is used.
3	The OMS CT Tool shall receive the answer from the DUT	
4	The test sequence is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD telegram content is successfully checked for <ul style="list-style-type: none"> standard response with mandatory data points according [OMS-S2], Annex M, M1.5 or <ul style="list-style-type: none"> empty response according to [OMS-S2], Annex M., M1.5 	
5	Test sequences 2...4 shall be repeated once	
Test result		
1	The Test is successfully passed if 2 of 2 test sequences have been successful. otherwise the test is failed	

4.2.2.2.2 [T43-UC00-2] Test for Command with Short Response

This test is mandatory.

Table 12 – [T43-UC00-2] Test for command with short response

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall prepare the command “Test response short” ([OMS-S2], Annex M, table M.4) using <ul style="list-style-type: none"> defined security profile as declared in [OMS-CT-ManDec] defined application security if implemented, using KeyID 1Fh as declared in [OMS-CT-ManDec] 	
2	The OMS CT Tool shall send the command “Test response short” ([OMS-S2], Annex M, tables M.4 and M.6) to the DUT	Seq_SND-UDx (see [OMS-S2], Annex M) is used.
3	The OMS CT Tool shall receive the answer from the DUT	
4	The test sequence is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD The received data is '42h 42h' ([OMS-S2], Annex M, Table M.4) 	
5	Test sequences 2...4 shall be repeated once without interruption	
Test result		
1	The Test is successfully passed if 2 of 2 test sequences have been successful. otherwise the test is failed	

4.2.2.2.3 [T43-UC00-3] Test for Command with Long Response

This test is mandatory.

Table 13 – [T43-UC00-3] Test for command with long response

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
3	The [OMS-CT-ManDec] declares the maximum datagram-length to be transmitted by the DUT.	
Test sequence		
1	The OMS CT Tool shall prepare the command “Test response long” ([OMS-S2] Annex M, tables M.4 and M.6) using defined security profile as declared in [OMS-CT-ManDec] defined application security if implemented, using KeyID 1Fh as declared in [OMS-CT-ManDec]	
2	The OMS CT Tool shall send the command “Test response long” ([OMS-S2] Annex M, tables M.4 and M.6) to the DUT	Seq_SND-UDx (see [OMS-S2], Annex M) is used.
3	The OMS CT Tool shall receive the answer from the DUT	
4	The test sequence is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD The received data is N times ‘43h’ ([OMS-S2], Annex M, Tables M.4 and M.6) where N corresponds to the maximum datagram length according to [OMS-CT-ManDec] 	N depends on the applied security profile and application security. The datagram-length will be less or equal to the length declared in [OMS-CT-ManDec].
5	Test sequences 2...4 shall be repeated once without interruption	
Test result		
1	The Test is successfully passed if 2 of 2 test sequences have been successful. otherwise the test is failed	

4.2.2.2.4 [T43-UC00-4] Test for Test Command Long

This test is mandatory.

Table 14 – [T43-UC00-4] Test for test command long

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
3	The [OMS-CT-ManDec] declares the maximum datagram-length according to [OMS-S2], 5.2.2	
Test sequence		
1	The OMS CT Tool shall prepare the command “Test command long” ([OMS-S2] Annex M, table M.4) using defined security profile as declared in [OMS-CT-ManDec] defined application security if implemented, using KeyID 1Fh as declared in [OMS-CT-ManDec] with the maximum datagram-length as declared in [OMS-CT-ManDec]	The actual length may be less due to applied security profile and application profile.
2	The OMS CT Tool shall send the command “Test command long” ([OMS-S2], Annex M, table M.4) to the DUT	Seq_SND-UDx (see [OMS-S2], Annex M) is used.
3	The OMS CT Tool shall receive the answer from the DUT	
4	The test sequence is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD The received data is the last 4 bytes of the test pattern sequence ([OMS-S2], Annex M, Table M.4) 	
5	Test sequences 2...4 shall be repeated once without interruption	
Test result		
1	The Test is successfully passed if 2 of 2 test sequences have been successful. otherwise the test is failed	

4.2.2.3 Error Response

4.2.2.3.1 [T43-UC00-5] Test for Error Response

This test is mandatory.

Target is to test the application error response to a command and the timeout of a specific response.

Table 15 – [T43-UC00-5] Test for Error Response

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	All communication sequences are finalized, DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall prepare the command “Application error” ([OMS-S2], Annex M, table M.4) using <ul style="list-style-type: none"> defined security profile defined Encryption and Authentication defined application security if implemented, using KeyID 1Fh 	
2	The OMS CT Tool shall sent the command “Application error” ([OMS-S2], Annex M, table M.4) to the DUT	
3	The OMS CT Tool shall receive the answer1 from the DUT	
4	Waiting Time for 10...15 sec	
5	The OMS CT Tool shall send a REQ-UD2 to the DUT	
6	The OMS CT Tool shall receive the answer2 from the DUT	
7	Waiting Time for >= 250 sec	
8	The OMS CT Tool shall send a REQ-UD2 to the DUT as answer to SND-NR with BiDi Access	
9	The OMS CT Tool shall receive the answer3 from the DUT	
Test result		
1	The test [T43-UC00-5] is successfully passed if the received answer1 is evaluated by <ul style="list-style-type: none"> telegram type the telegram shall be an Application Error answer1 = answer2 answer3 != answer1 	Evaluation of answer3 missing

4.3 Test Case for UseCase 01 (UC-01) - [OMS-CT4.APL] Addition

4.3.1 Introduction

The implementation of OMS UseCase 01 according [OMS-S2], Annex M is declared in the [OMS-CT-ManDec] .

For successful conformity test all test criterias of this chapter must be passed.

Special Information on DUT required for UC01 [OMS-CT-ManDec] :

- Instructions how installation procedure is started
- Interval of SND-IR telegrams
- Applied Encryption and Authentication [OMS-S2], Annex M, Table M.7

4.3.2 [T44-UC01-1] Test Meter Registration

The Meter Registration is optional.

For the current release of [OMS-S2], Annex M this test is identical to [T31-TIM2a].

If the manufacturer declares implementation of UC01 in the [OMS-CT-ManDec] this test shall be passed.

Table 16 – [T44-UC01-1] Test Meter Registration

Index	Description	Remark
Precondition		
1	DUT is not in FAC.	
Test sequence		
1	Trigger the DUT manually to start the Meter Registration.	
2	The OMS CT Tool shall receive the SND-IR of the device	
3	The first SND-IR is sent within 60 seconds	
4	The SND-IR is repeated at least 5 times (6 transmissions) The SND-IR interval shall be within 30 and 60 seconds	
5	The transmission of installation messages shall stop no later than 60 minutes after the manual start event	
Test result		
1	The test [T44-UC01-1] is successfully passed if the test execution was once in 2 runs successful. Otherwise, the test [T44-UC01-1] is failed .	

4.4 Test Cases for UseCase 03 (UC-03) - [OMS-CT4.APL] Addition

4.4.1 Introduction

For a successful conformity test all test criteria's of this chapter have to be passed, if UseCase 03 is supported by the DUT.

The Implementation of OMS UseCase 03 according to [OMS-S2], Annex M is optional and will be tested if UseCase 03 is declared in the [OMS-CT-ManDec].

If not described in another way, all communication shall use the ASP10 according to [OMS-S2], Table 41 with the specified settings:

- BCF = 20h / A0h
- PID = 01h
- KeyID = 20h
- TargetTime = 3000000000h

4.4.2 [T60-UC03-0] Test for Radio Content

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on).

Table 17 – [T60-UC03-0] Test for radio content

Index	Description	Remark
Precondition		
1	DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall check every datagram which is not marked as static for MB-Data-Tags <ul style="list-style-type: none">• DC1!• DC2!	
Test result		
1	The test is successfully passed if every received datagram, which is a SND-NR datagram and is not marked as static, contains the MB-Data-Tags: <ul style="list-style-type: none">• DC1!• DC2! Otherwise the test is failed.	

4.4.3 Basic Communication Tests

4.4.3.1 [T60-UC03-10] Test for Basic Communication Precondition

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on).

Table 18 – [T60-UC03-10] Test for basic communication precondition

Index	Description	Remark
Precondition		
1	DUT is not in FAC..	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx [App-Reset, MBusData] <ul style="list-style-type: none"> the command "XDC1!" with value 00h (close/disconnect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	The test is successfully passed if the received response is evaluated by <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag "DC1!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag "DC2!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.3.2 [T60-UC03-11] Test for Basic Usage of Subunit

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on).

Table 19 – [T60-UC03-11] Test for basic usage of subunit

Index	Description	Remark
Precondition		
1	Continuously check for subunit during the complete test procedure.	
Test sequence		
1	<p>The OMS CT Tool shall check every datagram which is not marked as static for MB-Data-Tags.</p> <p>The subunit in each data information block in the whole communication shall be checked for the following MB-Data-Tags:</p> <ul style="list-style-type: none"> • DC1! • DC2! 	
Test result		
1	<p>The test is successfully passed if the subunit of all data information blocks of named MB-Data-Tags are:</p> <p>If device type of DUT is 20h or 21h:</p> <ul style="list-style-type: none"> • Subunit = 0 <p>If device type of DUT is 02h, 03h, 04h, 06h, 07h, 08h, 0Ah, 0Bh, 0Ch, 0Dh, 15h, or 16h:</p> <ul style="list-style-type: none"> • Subunit = 1 <p>Otherwise the test is failed.</p>	For communication the OMS-CTT need to set the subunit within XDC1! to 1 in required cases otherwise to 0

4.4.3.3 [T60-UC03-12] Test for wrong usage of Subunit

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on).

Table 20 – [T60-UC03-12] Test for wrong usage of Subunit

Index	Description	Remark
Precondition		
1	If device type of DUT is 20h or 21h: <ul style="list-style-type: none"> Run test case [T60-UC03-10] with subunit 1 If device type of DUT is 02h, 03h, 04h, 06h, 07h, 08h, 0Ah, 0Bh, 0Ch, 0Dh, 15h, or 16h: <ul style="list-style-type: none"> Run test case [T60-UC03-10] with subunit 0 	
Test sequence		
1	The OMS CT Tool shall check the response datagram from the DUT.	
Test result		
1	The test is successfully passed if the device does not responds with DC1! or DC2! on the command XDC1! Otherwise the test is failed .	

4.4.4 Tests for Type “Direct switch-on”

4.4.4.1 [T60-UC03-20] Test for Open/Connect for Type “Direct switch-on”

This test is mandatory for disconnector type “Direct switch-on”.

Table 21 – [T60-UC03-20] Test for open/connect for type “Direct switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-10] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 01h (open/connect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 01h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.4.2 [T60-UC03-21] Test for Open/Connected Loop for Type “Direct switch-on”

This test is mandatory for disconnector type “Direct switch-on”.

Table 22 – [T60-UC03-21] Test for open/connected loop for type “Direct switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-20] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 01h (open/connect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 01h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.4.3 [T60-UC03-22] Test for Close/Disconnect for Type “Direct switch-on”

This test is mandatory for disconnector type “Direct switch-on”.

Table 23 – [T60-UC03-22] Test for close/disconnect for type “Direct switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-21] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 00h (close/disconnect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.4.4 [T60-UC03-23] Test for Close/Disconnect Loop for Type “Direct switch-on”

This test is mandatory for disconnector type “Direct switch-on”.

Table 24 – [T60-UC03-23] Test for close/disconnect loop for type “Direct switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-22] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 00h (close/disconnect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.5 Tests for Type “Manual switch-on”

4.4.5.1 [T60-UC03-30] Test for Open/Connect for Type “Manual switch-on”

This test is mandatory for disconnector type “Manual switch-on”.

Table 25 – [T60-UC03-30] Test for open/connect for type “Manual switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-10] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 01h (open/connect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 02h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.5.2 [T60-UC03-31] Test for Release for Type “Manual switch-on”

This test is mandatory for disconnecter type “Manual switch-on”.

Table 26 – [T60-UC03-31] Test for release for type “Manual switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-10] was passed	
Test sequence		
1	Execute [T60-UC03-10] again	It is necessary for put DUT in closed/disconnected state
2	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> - the command “XDC1!” - with value 02h (release) 	See [OMS-S2], Annex M, Release A, Table M.8
3	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> • no application error • no application busy • MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> ○ value is = 02h • MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> ○ value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.5.3 [T60-UC03-32] Test for Manual Action for Type “Manual switch-on”

This test is mandatory for disconnecter type “Manual switch-on”.

Table 27 – [T60-UC03-32] Test for manual action for type “Manual switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-31] was passed	
3	Wait for status “closed/disconnect” (by SND-NR or RSP-UD) <ul style="list-style-type: none"> MB-Data -Tag “DC2!” <ul style="list-style-type: none"> value is = 00h 	
Test sequence		
1	Perform manufacturer declared action for manual switch-on actions	
2	The OMS CT Tool shall receive the standard-response from the DUT (RSP-UD) after REQ-UD2 and Appl.Reset	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 01h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.5.4 [T60-UC03-33] Test for Open/Connected Loop for Type “Manual switch-on”

This test is mandatory for disconnector type “Manual switch-on”.

Table 28 – [T60-UC03-33] Test for open/connected loop for type “Manual switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-32] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 01h (open/connect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 01h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.5.5 [T60-UC03-34] Test for Released Loop for Type “Manual switch-on”

This test is mandatory for disconnector type “Manual switch-on”.

Table 29 – [T60-UC03-34] Test for released loop for type “Manual switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-33] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 02h (release) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 01h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.5.6 [T60-UC03-35] Test for Close/Disconnect for Type “Manual switch-on”

This test is mandatory for disconnecter type “Manual switch-on”.

Table 30 – [T60-UC03-35] Test for close/disconnect for type “Manual switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-34] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 00h (close/disconnect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.5.7 [T60-UC03-36] Test for Close/Disconnect Loop for Type “Manual switch-on”

This test is mandatory for disconnector type “Manual switch-on”.

Table 31 – [T60-UC03-35] Test for close/disconnect loop for type “Manual switch-on”

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-35] was passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx <ul style="list-style-type: none"> the command “XDC1!” with value 00h (close/disconnect) 	See [OMS-S2], Annex M, Release A, Table M.8
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag “DC1!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag “DC2!” is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.6 Tests for ASP10

4.4.6.1 [T60-UC03-40] Test for Unsecure Communication (without ASP10)

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on).

Table 32 – [T60-UC03-40] Test for unsecure communication (without ASP10)

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-36] or [T60-UC03-23] is passed	Depending on the disconnecter type (Direct switch-on or Manual switch-on).
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx [App-Reset, MBusData] <ul style="list-style-type: none"> the command "XDC1!" with value 01h (open/connect) without "ASP10", no application security 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	<p>The test is successfully passed if the received response is evaluated by</p> <ul style="list-style-type: none"> application error MB-Data-Tag "DC1!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag "DC2!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.6.2 [T60-UC03-41] Test for other Application Security Communication (e.g. with ASP1)

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on).

Table 33 – [T60-UC03-41] Test for other application security communication (e.g. with ASP1)

5

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-36] or [T60-UC03-23] is passed	Depending on the disconnecter type (Direct switch-on or Manual switch-on).
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx [App-Reset, MBusData] <ul style="list-style-type: none"> the command "XDC1!" with value 01h (open/connect) with "ASP1", wrong application security 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	The test is successfully passed if the received response is evaluated by <ul style="list-style-type: none"> application error MB-Data-Tag "DC1!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag "DC2!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.6.3 [T60-UC03-42] Test for wrong Settings of Security Communication (e.g. with ASP1)

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on).

Table 34 – [T60-UC03-42] Test for wrong settings of security communication (e.g. with ASP1)

5

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60-UC03-36] or [T60-UC03-23] is passed	Depending on the disconnecter type (Direct switch-on or Manual switch-on).
3	[T60-UC03-40] and [T60-UC03-41] are passed	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx [App-Reset, MBusData] <ul style="list-style-type: none"> the command "XDC1!" with value 01h (open/connect) with "ASP10" and KeyID=21h 	KeyID wrong
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	The test is successfully passed if the received response is evaluated by <ul style="list-style-type: none"> application error MB-Data-Tag "DC1!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag "DC2!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>Otherwise the test is failed.</p>	

4.4.6.4 [T60-UC03-43] Test for Target Time in ASP10

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on), in case the manufacturer has declared support of the target time feature within [OMS-CT-ManDec] .

5

Table 35 – [T60-UC03-43] Test for target time in ASP10

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	UseCase4 shall be supported	
3	Current time of device within RSP-UD (standard response) has been received.	
4	[T60-UC03-36] or [T60-UC03-23] is passed	Depending on the disconnecter type (Direct switch-on or Manual switch-on).
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx [App-Reset, MBusData] <ul style="list-style-type: none"> the command "XDC1!" with value 01h (open/connect) TargetTime in ASP10 set to readout time (precondition 3) + 60 seconds 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
3	Wait 20 seconds	
4	Seq_SND-UDx [App-Reset, REQ-UD2 / SND-UD2]	
5	Wait 60 seconds	
6	Seq_SND-UDx [App-Reset, REQ-UD2 / SND-UD2]	
Test result		
1	<p>The test is successfully passed if the received immediate response and the response after 20 seconds: (after step 2 and 4)</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag "DC1!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h MB-Data -Tag "DC2!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h <p>the response after 80 seconds (after step 6):</p> <ul style="list-style-type: none"> no application error no application busy MB-Data-Tag "DC1!" is within RSP-UD <ul style="list-style-type: none"> value is = 01h or 02h MB-Data -Tag "DC2!" is within RSP-UD <ul style="list-style-type: none"> value is = 00h or 01h 	

	Otherwise the test is failed.	
--	-------------------------------	--

4.4.6.5 [T60-UC03-44] Test for Unsupported Target Time in ASP10

This test is mandatory for both types of disconnecter (Direct switch-on, Manual switch-on), in case the manufacturer has **not** declared support of the target time feature within [OMS-CT-ManDec] .

5

Table 36 – [T60-UC03-44] Test for unsupported target time in ASP10

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	Current time of device within RSP-UD (standard response) has been received.	
3	[T60-UC03-36] or [T60-UC03-23] is passed	Depending on the disconnecter type (Direct switch-on or Manual switch-on).
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx [App-Reset, MBusData] <ul style="list-style-type: none"> the command "XDC1!" with value 01h (open/connect) TargetTime in ASP10 set to readout time (precondition 3) + 60 seconds 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD) after REQ-UD2 / SND-UD2	
Test result		
1	The test is successfully passed if the received response is evaluated by <ul style="list-style-type: none"> replied with a SITP status response using value 23h Otherwise the test is failed.	

4.5 Test Cases for UseCase 04 (UC-04) - [OMS-CT4.APL] Addition

4.5.1 [T43-UC04-1] OMS-UC-04 a/b/c: Read Time

According to the OMS-UC-04 the DUT shall respond with the MB-Data-Tag DT1! in the standard response and in SND-NR messages (except static messages).

Table 37 – [T60-UC04-1] OMS-UC-04 a/b/c: Read Time

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The manufacturer confirms in the [OMS-CT-ManDec] that OMS-UC-04 is being supported	
3	All communication sequences are finalized, DUT is not in FAC	
Test sequence		
1	OMS CT Tool receives a telegram with bidi access enabled	
2	OMS CT Tool sends a SND-UDx with [App-Reset] to the DUT	
3	OMS CT Tool receives a RSP-UD from the DUT	
4	In case of Error the test sequences (step 1..3) shall be repeated once	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> SND-NR contains the MB-Data-Tag DT1! and RSP-UD contains the MB-Data-Tag DT1! <p>Otherwise the test is failed.</p>	

4.5.2 [T43-UC04-2] OMS-UC-04 a/b: Adjust and Correct Clock Time by Gateway

According to the OMS-UC-04 the DUT shall support the Clock Synchronization Protocol according to [OMS-S2], 8.7, with both functions:

- "Time adjustment" (TC-field 01h or 02h and time format type J)
- "Time correction" (TC-field 03h and time format type J)

Table 38 – [T60-UC04-2] OMS-UC-04 a/b: Adjust and Correct Clock Time by Gateway

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The manufacturer confirms in the [OMS-CT-ManDec] that OMS-UC-04 a or b is being supported and informs about supported TC-field values	
3	All communication sequences are finalized, DUT is not in FAC	
Test sequence		
1.1	Read time of DUT (according test case "Read Time")	
2.1	OMS CT Tool sends a SND-UD with [Clock-Sync] and "Time adjustment" TC-field 01 to the DUT, time shall differ more than 60 seconds	check that invalid deviations are not accepted
2.2	OMS CT Tool receives an ACK from the DUT with a TPL Status Byte showing "any application error".	
2.3	OMS CT Tool shall send a REQ-UD2 to acquire application error from the DUT via RSP-UD	Application error 15h expected
2.4	In case of an communication Error the test sequences (step 2.1..2.3) shall be repeated	
3.1	OMS CT Tool sends a SND-UD with [Clock-Sync] and "Time adjustment" TC-field 01 or 02 (depending on what is supported by the DUT) to the DUT, time to be adjusted shall differ less than 60 seconds	adjust time use time format type J
3.2	OMS CT Tool receives an ACK from the DUT with a TPL Status Byte showing "no error".	Correct command execution can only be verified after 12 hours
3.3	In case of a communication Error the test sequences (step 3.1..3.2) shall be repeated	
4.1	OMS CT Tool sends a SND-UD with [Clock-Sync] and "Time adjustment" TC-field 01 or 02 (depending on what is supported by the DUT) to the DUT	check that no further adjustment/correction will be accepted

Index	Description	Remark
4.2	OMS CT Tool receives an ACK from the DUT with a TPL Status Byte showing “any application error”.	
4.3	OMS CT Tool shall send a REQ-UD2 to acquire application error from the DUT via RSP-UD	Application error 10h expected
4.4	In case of a communication Error the test sequences (step 4.1..4.3) shall be repeated	
5	Wait 12 hours	if no communication error
6.1	OMS CT Tool receives a telegram with bidi access enabled	
6.2	OMS CT Tool sends a SND-UDx with [App-Reset] to the DUT	
6.3	OMS CT Tool receives a RSP-UD from the DUT	containing DT1! Time adjustment expected to have been effectuated
6.4	In case of an communication Error the test sequences (step 6.1..6.3) shall be repeated once	
7	Repeat test with (steps 1.1..6.4) <ul style="list-style-type: none"> • “Time correction” TC-field 03 	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> • sequence 3 was successful for <ul style="list-style-type: none"> ○ either “Time adjustment” with TC-field 01 or with TC-field 02, ○ and “Time correction” with TC-field 03 • and sequence 2 failed (Application error 15h) • and sequence 4 failed (Application error 10h) • and time read in sequence 6 is according to the time read in step 1.1 taking the time adjustment/correction correctly into account <p>Otherwise the test is failed.</p>	

NOTE 1: A clock correction or adjustment can be confirmed not earlier than 12 hours after the correction or adjustment. Use “Read Time” for confirmation.

NOTE 2: A once initiated clock adjustment/setting will prevent adjustment/setting as long as the adjustment /setting is ongoing.

4.5.3 [T43-UC04-3] OMS-UC-04b/c: Adjust Clock Time by Head-End

According to the OMS-UC-04 the DUT shall support the Clock Synchronization Protocol according to [OMS-S2], 8.7, with both functions:

- “Time adjustment” (TC-field 01h or 02h and time format type J)
- “Time correction” (TC-field 03h and time format type J)

Table 39 – [T60-UC04-3] OMS-UC-04b/c: Adjust Clock Time by Head-End

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The manufacturer confirms in the [OMS-CT-ManDec] that OMS-UC-04 b or c is supported and informs about supported TC-field values	
3	All communication sequences are finalized, DUT is not in FAC	
4	[OMS-CT-ManDec] provides key for ASP10.	
Test sequence		
1	Read time of DUT (according test case “Read Time”)	
2.1	OMS CT Tool sends a SND-UD with [Clock-Sync] and “Time adjustment” TC-field 01 or 02 (depending on what is supported by the DUT) to the DUT, time to be adjusted shall differ more than 60 seconds	check that invalid deviations are not accepted
2.2	OMS CT Tool receives an ACK from the DUT with a TPL Status Byte showing “any application error”.	
2.3	OMS CT Tool shall send a REQ-UD2 to acquire the application answer via RSP-UD. This SITP answer contains an application error showing the value 15 _h “parameter is missing or wrong”	Application error 15 _h is expected SITP-PID is 02 _h indicating application error protocol
2.4	In case of a communication Error the test sequences (step 2.1..2.3) shall be repeated once	
3.1	OMS CT Tool sends a SND-UD with [Clock-Sync] and “Time adjustment” TC-field 01 or 02 (depending on what is supported by the DUT) to the DUT, time to be adjusted shall differ less than 60 seconds	adjust time use time format type J
3.2	OMS CT Tool receives an ACK from the DUT with a TPL Status Byte showing “no error”.	

Index	Description	Remark
3.3	OMS CT Tool shall send a REQ-UD2 to acquire the application answer via RSP-UD that contains a SITP status response (DSI 22) with a value 00 _h "successful SITP command"	Correct command execution can only be verified after 12 hours
3.4	In case of a communication Error the test sequences (step 3.1..3.3) shall be repeated	
4.1	OMS CT Tool sends a SND-UD with [Clock-Sync] and "Time adjustment" TC-field 01 or 02 (depending on what is supported by the DUT) to the DUT	check that no further adjustment/correction will be accepted
4.2	OMS CT Tool receives an ACK from the DUT with a TPL Status Byte showing "any application error".	
4.3	OMS CT Tool shall send a REQ-UD2 to acquire the application answer via RSP-UD. This SITP answer contains an application error showing the value 15 _h "parameter is missing or wrong"	Application error 10h expected SITP-PID is 02 _h indicating application error protocol
4.4	In case of a communication Error the test sequences (step 4.1..4.3) shall be repeated	
5	Wait 12 hours	if no communication error
6.1	OMS CT Tool receives a telegram with bidi access enabled	
6.2	OMS CT Tool sends a SND-UDx with [App-Reset] to the DUT	
6.3	OMS CT Tool receives a RSP-UD from the DUT	containing DT1! Time adjustment expected to have been effectuated
6.4	In case of an communication Error the test sequences (step 6.1..6.3) shall be repeated	
7	Repeat test with (steps 1.1..6.4) <ul style="list-style-type: none"> "Time correction" TC-field 03 	
8	OMS CT Tool shall test [OMS-UC-04a]	

Index	Description	Remark
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none">• sequence 3 was successful for<ul style="list-style-type: none">○ either “Time adjustment” with TC-field 01 or with TC-field 02,○ and “Time correction” with TC-field 03• and sequence 2 failed (Application error 15h)• and sequence 4 failed (Application error 10h)• and time read in sequence 6 is according to the time read in step 1.1 taking the time adjustment/correction correctly into account• and [OMS-UC-04a] failed <p>Otherwise the test is failed.</p>	

NOTE 1: A clock correction or adjustment can be confirmed not earlier than 12 hours after the correction or adjustment. Use “Read Time” for confirmation.

NOTE 2: A once initiated clock adjustment/setting will prevent adjustment/setting as long as the adjustment /setting is ongoing.

4.5.4 [T43-UC04-4] OMS-UC-04b/c: Set Date and Time by Head-End

According to the OMS-UC-04 the DUT shall only support function "Time setting" with TC-field 00h and time format type I shall be supported.

Table 40 – [T60-UC04-4] OMS-UC-04b/c: Set Date and Time by Head-End

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The manufacturer confirms in the [OMS-CT-ManDec] OMS-UC-04 b or c is being supported	
3	All communication sequences are finalized, DUT is not in FAC	
4	[OMS-CT-ManDec] provides key for ASP10.	
Test sequence		
1.1	OMS CT Tool receives a telegram with bidi access enabled	
1.2	OMS CT Tool sends a SND-UD with [Clock-Sync] and "Time setting" with TC-field 00h to the DUT	use time format type I remember time difference to world-time
1.3	OMS CT Tool receives an ACK from the DUT with a TPL Status Byte showing "no error".	
1.4	OMS CT Tool shall send a REQ-UD2 to acquire the application answer via RSP-UD that contains a SITP status response (DSI 22) with a value 00h "successful SITP command"	
1.5	In case of an communication Error the test sequences (step 1.1.. 1.4) shall be repeated	
2	Read time of DUT (according test case "Read Time")	
3	OMS CT Tool shall perform the test case "Adjust Clock Time by Gateway"	To check if this test case intentionally fails.
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> • "Time setting" with TC-field 00h was successful, • and time read in step 2 is according to the dates and time set in step 1.2 • and step 3 "Adjust Clock Time by Gateway" failed <p>Otherwise the test is failed.</p>	

5 **NOTE:** With "Set Time" the time is set immediately.

4.6 Test Cases for UseCase 05 (UC-05) - [OMS-CT4.APL] Addition

4.6.1 Introduction

For a successful conformity test all test criteria of this chapter have to be passed, if UseCase 05 is supported by the DUT.

The implementation of OMS UseCase 05 according to [OMS-S2], Annex M is optional and will be tested if UseCase 05 is declared in the [OMS-CT-ManDec].

For the UseCase05 a special OMS image will be used. This image has the following attributes:

- Image size: 500 byte *UC05_SIZE*
- Image content: 500 time 00h
- Image Identifier: defined as following *UC05_IDENTIFIER*

Manufacturer (LSB first)	Version	Device type	Manufacturer Image Identifier
OMG (A73Dh)	FFh	FFh	FFFFh

- The used MAC will be calculated by the test tool *UC05_MAC_CALC* with KeyID: 18h

Special Information on the DUT required for UC05 [OMS-CT-ManDec]:

- Declaration of usage for UseCase 05
 - Key for KeyID: 18h
 - Key for KeyID: 23h

If not described in another way, all communication shall use the ASP10 according to [OMS-S2], Table 47 with the specified settings:

- BCF = 20h / A0h
- PID = 06h
- KeyID = 23h
- TargetTime = 3000000000h

4.6.2 Phase 1 – Tests for Transfer Preparation

4.6.2.1 [T60-UC05-01] Test for successful preparation

Table 41 – [T60-UC05-01] Test for successful preparation

Index	Description	Remark
Precondition		
1	DUT is not in FAC	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Prepare command: See [EN 13757-3], Annex I, section I.2.4 • with Size information <i>UC05_SIZE</i> with Image identifier field <i>UC05_IDENTIFIER</i> • with MAC <i>UC05_MAC_CALC</i> with MAC Algorithm ID: 04h and KeyID: 18h • without Date and Time • without Pace • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
3	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • State command: See [EN 13757-3], Annex I, section I.2.11 • with Function field 04h • with Image identifier field <i>UC05_IDENTIFIER</i> • Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received Prepare response (see EN 13757-3:2018 Annex I, section I.2.5) in step 2 has <ul style="list-style-type: none"> ◦ Function field: 80h ◦ Sub function field with bits RFU: 0, IDEN: 1, RDY: 0, SZIN: 0 ◦ Image identifier field: <i>UC05_IDENTIFIER</i> • the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> ◦ Function field: 84h ◦ Sub function field with State: 2 (Transfer initiated) ◦ Image identifier field: <i>UC05_IDENTIFIER</i> 	

	Otherwise the test is failed .	
--	---------------------------------------	--

4.6.2.2 [T60-UC05-02] Test for unsuccessful terminated preparation by identifier

Table 42 – [T60-UC05-02] Test for unsuccessful terminated preparation by identifier

Index	Description	Remark
Precondition		
1	[T60-UC05-01] was passed	
2	Device is in state: "Transfer initiated" (2)	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Terminate command: See EN 13757-3:2018 Annex I, section I.2.17 • with Function field 07h • with Image identifier field != UC05_IDENTIFIER • with subfunction field with bit T_IT: 1 • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
3	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • State command: See EN 13757-3:2018 Annex I, section I.2.11 • with Function field 04h • with Image identifier field UC05_IDENTIFIER • Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> ○ Function field: 84h ○ Sub function field with State: 2 ○ Image identifier field: UC05_IDENTIFIER <p>Otherwise the test is failed.</p>	

4.6.2.3 [T60-UC05-03] Test for unsuccessful terminated preparation by bit

Table 43 – [T60-UC05-03] Test for unsuccessful terminated preparation by bit

Index	Description	Remark
Precondition		
1	[T60-UC05-01] was passed	
2	Device is in state: "Transfer initiated" (2)	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Terminate command: See EN 13757-3:2018 Annex I, section I.2.17 • with Function field 07h • with Image identifier field <i>UC05_IDENTIFIER</i> • with subfunction field with bit T_IT: 0 • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
3	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • State command: See EN 13757-3:2018 Annex I, section I.2.11 • with Function field 04h • with Image identifier field <i>UC05_IDENTIFIER</i> • Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> ○ Function field: 84h ○ Sub function field with State: 2 ○ Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.2.4 [T60-UC05-04] Test for terminated transfer

Table 44 – [T60-UC05-04] Test for terminated transfer

Index	Description	Remark
Precondition		
1	[T60-UC05-01] was passed	
2	Device is in state: "Transfer initiated" (2)	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Terminate command: See EN 13757-3:2018 Annex I, section I.2.17 • with Function field 07h • with Image identifier field <i>UC05_IDENTIFIER</i> • with subfunction field with bit T_IT: 1 • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received Terminate response (see EN 13757-3:2018 Annex I, section I.2.18) in step 2 has <ul style="list-style-type: none"> ○ Function field: 87h ○ Sub function field with State: 14 ○ Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.2.5 [T60-UC05-05] Test for unsuccessful preparation

Table 45 – [T60-UC05-05] Test for unsuccessful preparation

Index	Description	Remark																								
Precondition																										
1	[T60-UC05-04] was passed																									
2	Device is in state “Image Transfer Terminated” (14)																									
Test sequence																										
	The following 4 tests steps has to be repeated for each sub-test number (#1 - #3)																									
1	<div>The OMS CT Tool shall handle the following sequence send Seq_SND-UDx [ITP-Cmd] for each of the following sub-tests<ul style="list-style-type: none">the Prepare Command: See EN 13757-3:2018 Annex I, section I.2.4Application security with ASP10<table><tr><th>Subtest</th><th>#1</th><th>#2</th><th>#3</th></tr><tr><td>Size-Information</td><td>without</td><td>with</td><td>with</td></tr><tr><td>Image Identifier</td><td>with</td><td>with</td><td>with</td></tr><tr><td>MAC field</td><td>with</td><td>without</td><td>with</td></tr><tr><td>MAC-Algorithm-ID</td><td>04h</td><td>04h</td><td>04h</td></tr><tr><td>KeyID</td><td>18h</td><td>18h</td><td>19h</td></tr></table></div>	Subtest	#1	#2	#3	Size-Information	without	with	with	Image Identifier	with	with	with	MAC field	with	without	with	MAC-Algorithm-ID	04h	04h	04h	KeyID	18h	18h	19h	
Subtest	#1	#2	#3																							
Size-Information	without	with	with																							
Image Identifier	with	with	with																							
MAC field	with	without	with																							
MAC-Algorithm-ID	04h	04h	04h																							
KeyID	18h	18h	19h																							
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd] for each of the sub-tests defined in step 1																									
3	<div>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd] for each of the sub-tests defined in step 1<ul style="list-style-type: none">State command: See EN 13757-3:2018 Annex I, section I.2.11with Function field 04hImage identifier field UC05_IDENTIFIEROptional: Application security with ASP10</div>																									
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd] for each of the sub-tests defined in step 1																									
Test result																										
1	<div>The test is successfully passed if (for each of the sub-tests defined in step 1)<ul style="list-style-type: none">the received Prepare response (see EN 13757-3:2018 Annex I, section I.2.5) in step 2 has<ul style="list-style-type: none">Function field: 80hSub function field with bit RDY: 1Image identifier field: UC05_IDENTIFIERthe received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has<ul style="list-style-type: none">Function field: 84hSub function field with State: “Image Transfer Terminated” (14)Image identifier field: UC05_IDENTIFIER</div>																									

	Otherwise the test is failed.	
--	-------------------------------	--

4.6.3 Phase 2 – Image Transfer

4.6.3.1 [T60-UC05-20] Test for terminated transfer preparation

Table 46 – [T60-UC05-20] Test for terminated transfer preparation

Index	Description	Remark
Precondition		
1	Re-run [T60-UC05-01]	
2	[T60-UC05-01] was passed	
3	Device is in state: "Transfer initiated" (2)	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Terminate command: See EN 13757-3:2018 Annex I, section I.2.17 • with Function field 07h • with Image identifier field <i>UC05_IDENTIFIER</i> • with subfunction field with bit T_TR: 1 • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received Terminate Response (see EN 13757-3:2018 Annex I, section I.2.18) in step 2 has <ul style="list-style-type: none"> ○ Function field: 87h ○ Sub function field with State: 4 ○ Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.3.2 [T60-UC05-21] Test for Transfer Completion without Blocks

Table 47 – [T60-UC05-21] Test for Transfer Completion without Blocks

Index	Description	Remark
Precondition		
1	Re-run [T60-UC05-01]	
2	[T60-UC05-01] was passed	
3	Device is in state: "Transfer initiated" (2)	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UD [ITP-Cmd] <ul style="list-style-type: none"> Completion command: See EN 13757-3:2018 Annex I, section I.2.9 with Function field 03h with Image identifier field <i>UC05_IDENTIFIER</i> Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after REQ-UD2	
5	The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd] <ul style="list-style-type: none"> State command: See EN 13757-3:2018 Annex I, section I.2.11 with Function field 04h with Image identifier field <i>UC05_IDENTIFIER</i> Optional: Application security with ASP10 	
6	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> the received Completion Response (see EN 13757-3:2018 Annex I, section I.2.18) in step 4 has <ul style="list-style-type: none"> Function field: 83h Sub-function field: <ul style="list-style-type: none"> IDEN: 1 NBR: 1 Image identifier field: <i>UC05_IDENTIFIER</i> the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> Function field: 84h Sub function field with State: 6 Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.3.3 [T60-UC05-22] Test for Transfer SND_UD and REQ_UD2

Table 48 – [T60-UC05-22] Test for Transfer SND_UD and REQ_UD2

Index	Description	Remark
-------	-------------	--------

Precondition		
2	[T60-UC05-21] was passed	
3	Device is in state: "Transfer failed" (6)	
Test sequence		
1	<p>The OMS CT Tool shall send the first block Seq_SND-UD [ITP-Cmd]</p> <ul style="list-style-type: none"> • Transfer command: See EN 13757-3:2018 Annex I, section I.2.7.1 • with Function field 02h • with Image identifier field <i>UC05_IDENTIFIER</i> • with SEQ: 01b (first block) • Block number: 0 • Optional: Application security with ASP10 	
2	The OMS CT Tool shall receive the response	
3	The OMS CT Tool shall send a REQ-UD2 [ITP-RSP]	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after REQ-UD2	
5	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • State command: See EN 13757-3:2018 Annex I, section I.2.11 • with Function field 04h • with Image identifier field <i>UC05_IDENTIFIER</i> • Optional: Application security with ASP10 	
6	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • a ACK was received in step 2 • the received Transfer Response (see EN 13757-3:2018 Annex I, section I.2.18) in step 4 has <ul style="list-style-type: none"> ○ Function field: 82h ○ Sub function field with State: 3 ○ Image identifier field: <i>UC05_IDENTIFIER</i> • the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> ○ Function field: 84h ○ Sub function field with State: 3 ○ Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.3.4 [T60-UC05-23] Test for Transfer Completion after first block

Table 49 – [T60-UC05-23] Test for Transfer Completion after first block

Index	Description	Remark
Precondition		
1	[T60-UC05-22] was passed	
2	Device is in state: "Transfer active" (3)	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UD [ITP-Cmd] <ul style="list-style-type: none"> the Completion Command: See EN 13757-3:2018 Annex I, section I.2.9 with Function field 03h with Image identifier field <i>UC05_IDENTIFIER</i> Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after REQ-UD2	
5	The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd] <ul style="list-style-type: none"> State command: See EN 13757-3:2018 Annex I, section I.2.11 with Function field 04h with Image identifier field <i>UC05_IDENTIFIER</i> Optional: Application security with ASP10 	
6	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	The test is successfully passed if <ul style="list-style-type: none"> the received Completion Response (see EN 13757-3:2018 Annex I, section I.2.18) in step 4 has <ul style="list-style-type: none"> Function field: 83h Sub-function field: <ul style="list-style-type: none"> IDEN: 1 LIB: 1 NBR: 0 Image identifier field: <i>UC05_IDENTIFIER</i> Lost blocks field: <ul style="list-style-type: none"> 0001_h FFFF_h the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> Function field: 84h Sub function field with State: 6 Image identifier field: <i>UC05_IDENTIFIER</i> Otherwise the test is failed .	

4.6.3.5 [T60-UC05-24] Test for terminated transfer

Table 50 – [T60-UC05-24] Test for terminated transfer

Index	Description	Remark
-------	-------------	--------

Precondition		
1	[T60-UC05-23] was passed	
2	Device is in state: "Transfer failed" (6)	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Terminate command: See EN 13757-3:2018 Annex I, section I.2.17 • with Function field 07h • with Image identifier field <i>UC05_IDENTIFIER</i> • with subfunction field with bit T_IT: 1 • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received Terminate Response (see EN 13757-3:2018 Annex I, section I.2.18) in step 2 has <ul style="list-style-type: none"> ○ Function field: 87h ○ Sub function field with State: 14 ○ Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.3.6 [T60-UC05-25] Test for Transfer remaining blocks

Table 51 – [T60-UC05-25] Test for Transfer remaining blocks

Index	Description	Remark
Precondition		
1	re-run [T60-UC05-01]	
2	re-run [T60-UC05-22] (without pre-conditions)	
3	[T60-UC05-01] has passed	
4	[T60-UC05-22] has passed	
5	Device is in state: "Transfer active" (3)	
Test sequence		
1	<p>The OMS CT Tool shall send all remaining blocks Seq_SND-UD [ITP-Cmd]</p> <ul style="list-style-type: none"> • Transfer command: See EN 13757-3:2018 Annex I, section I.2.7.1 • with Function field 02h • with Image identifier field <i>UC05_IDENTIFIER</i> • with SEQ: <ul style="list-style-type: none"> ○ 10b (for intermediate blocks) ○ 11b (for the last block) • correct block number • Optional: Application security with ASP10 	
2	The OMS CT Tool shall receive the responses	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • a ACK was received for each remaining block <p>Otherwise the test is failed.</p>	

4.6.3.7 [T60-UC05-26] Test for successful Transfer Completion

Table 52 – [T60-UC05-26] Test for successful Transfer Completion

Index	Description	Remark
Precondition		
1	[T60-UC05-25] was passed	
2	Device is in state: "Transfer active" (3)	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UD [ITP-Cmd] <ul style="list-style-type: none"> Completion command: See EN 13757-3:2018 Annex I, section I.2.9 with Function field 03h with Image identifier field <i>UC05_IDENTIFIER</i> Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after REQ-UD2	
5	The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd] <ul style="list-style-type: none"> State command: See EN 13757-3:2018 Annex I, section I.2.11 with Function field 04h with Image identifier field <i>UC05_IDENTIFIER</i> Optional: Application security with ASP10 	
6	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> the received Completion Response (see EN 13757-3:2018 Annex I, section I.2.18) in step 4 has <ul style="list-style-type: none"> Function field: 83h Sub-function field: <ul style="list-style-type: none"> IDEN: 1 LIB: 0 NBR: 0 Image identifier field: <i>UC05_IDENTIFIER</i> the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> Function field: 84h Sub function field with State: 5 Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.4 Phase 3 – Image Validation

4.6.4.1 [T60-UC05-40] Test for successful image validation

Table 53 – [T60-UC05-40] Test for successful image validation

Index	Description	Remark
Precondition		
1	[T60-UC05-26] was passed	
2	Device is in state: "Transfer successful" (5)	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UD [ITP-Cmd] <ul style="list-style-type: none"> • Validate command: See EN 13757-3:2018 Annex I, section I.2.13 • with Function field = 05h • Image identifier field = <i>UC05_IDENTIFIER</i> • No additional info • Optional: Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD [ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
	The following tests steps shall be repeated until 300 seconds are over or the DUT will response with the state 9 (Validation successful) or 10 (Validation failed)	
3	After a waiting time of 10 seconds, the OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd] <ul style="list-style-type: none"> • State command: See EN 13757-3:2018 Annex I, section I.2.11 • with Function field 04h • Image identifier field <i>UC05_IDENTIFIER</i> • Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd] for each of the sub-tests defined in step 1	
Test result		
1	The test is successfully passed if <ul style="list-style-type: none"> • the received Validation Response (see EN 13757-3:2018 Annex I, section I.2.14) in step 2 has <ul style="list-style-type: none"> ○ Function field: 85h ○ State in sub-function field: 7 ○ Image identifier field: <i>UC05_IDENTIFIER</i> • all received State responses (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 have <ul style="list-style-type: none"> ○ Function field: 84h ○ Sub function field with State: 8, 9 ○ Image identifier field: <i>UC05_IDENTIFIER</i> • the last received State response within 300 seconds (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> ○ Function field: 84h ○ Sub function field with State: 9 ○ Image identifier field: <i>UC05_IDENTIFIER</i> 	

	Otherwise the test is failed.	
--	-------------------------------	--

4.6.4.2 [T60-UC05-41] Test for unsuccessful image validation

Table 54 – [T60-UC05-41] Test for unsuccessful image validation

Index	Description	Remark
Precondition		
1	re-run [T60-UC05-01] with wrong calculated MAC	
2	re-run [T60-UC05-22] (without pre-conditions)	
3	re-run [T60-UC05-26] (without pre-conditions)	
4	[T60-UC05-01] has passed	
5	[T60-UC05-22] has passed	
6	[T60-UC05-26] has passed	
7	Device is in state: "Transfer successful" (5)	
Test sequence		
1	See Test sequence for T60-UC05-40	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> the received Validation Response (see EN 13757-3:2018 Annex I, section I.2.14) in step 2 has <ul style="list-style-type: none"> Function field: 85h State in sub-function field: 7 Image identifier field: <i>UC05_IDENTIFIER</i> all received State responses (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> Function field: 84h Sub function field with State: 8 or 10 Image identifier field: <i>UC05_IDENTIFIER</i> the last received State response within 300 seconds (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> Function field: 84h Sub function field with State: 10 Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.4.3 [T60-UC05-42] Test for unsuccessful termination of image transfer

Table 55 – [T60-UC05-42] Test for unsuccessful termination of image transfer

Index	Description	Remark
Precondition		
1	[T60-UC05-41] was passed	
2	Device is in state: "Validation failed" (10)	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Terminate command: See EN 13757-3:2018 Annex I, section I.2.17 • with Function field 07h • with Image identifier field <i>UC05_IDENTIFIER</i> • with subfunction field with bit T_TR: 1 • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
3	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • State command: See EN 13757-3:2018 Annex I, section I.2.11 • with Function field 04h • with Image identifier field <i>UC05_IDENTIFIER</i> • Optional: Application security with ASP10 	
4	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received answer in step 2 is an Application Error (see EN 13757-3:2018, clause 10) <ul style="list-style-type: none"> ◦ with Error code: 10h • the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 4 has <ul style="list-style-type: none"> ◦ Function field: 84h ◦ Sub function field with State: 10 ◦ Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.4.4 [T60-UC05-43] Test for termination of image validation

Table 56 – [T60-UC05-43] Test for termination of image validation

Index	Description	Remark
Precondition		
1	[T60-UC05-42] was passed	
2	Device is in state: "Validation failed" (10)	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd]</p> <ul style="list-style-type: none"> • Terminate command: See EN 13757-3:2018 Annex I, section I.2.17 • with Function field 07h • with Image identifier field <i>UC05_IDENTIFIER</i> • with subfunction field with bit T_IT: 1 • Application security with ASP10 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
1	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> • the received Terminate response (see EN 13757-3:2018 Annex I, section I.2.18) in step 2 has <ul style="list-style-type: none"> ○ Function field: 87h ○ Sub function field with State: 14 ○ Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.6.5 Phase 4 – Image Validation

4.6.5.1 [T60-UC05-60] Test for successful image validation

Table 57 – [T60-UC05-60] Test for successful image validation

Index	Description	Remark
Precondition		
1	re-run [T60-UC05-01]	
2	re-run [T60-UC05-22] (without pre-conditions)	
3	re-run [T60-UC05-26] (without pre-conditions)	
4	re-run [T60-UC05-40] (without pre-conditions)	
5	[T60-UC05-01] has passed	
6	[T60-UC05-22] has passed	
7	[T60-UC05-26] has passed	
8	[T60-UC05-40] has passed	
9	Device is in state: "Validation successful" (9)	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UD [ITP-Cmd] <ul style="list-style-type: none"> • Activate command: See EN 13757-3:2018 Annex I, section I.2.15 • with Function field = 06h • with Sub-function field: 02h • with Date and Time: 10h • Image identifier field = <i>UC05_IDENTIFIER</i> • No additional info • Application security with ASP10 with <ul style="list-style-type: none"> ○ TargetTime = 3080000000h 	
2	The OMS CT Tool shall receive the response from the DUT (RSP-UD [ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
3	After waiting 616 seconds the OMS CT Tool is listening for the next ACC-NR/SND-NR telegram with an access window from the DUT.	600 seconds for activation and 16 seconds for Date and Time 10h in Activation command
4	The OMS CT Tool shall send Seq_SND-UDx [ITP-Cmd] <ul style="list-style-type: none"> • State command: See EN 13757-3:2018 Annex I, section I.2.11 • with Function field 04h • Image identifier field <i>UC05_IDENTIFIER</i> • Optional: Application security with ASP10 	
5	The OMS CT Tool shall receive the response from the DUT (RSP-UD[ITP-Rsp]) after Seq_SND-UDx [ITP-Cmd]	
Test result		
2	The test is successfully passed if <ul style="list-style-type: none"> • the received Activation Response (see EN 13757-3:2018 Annex I, section I.2.16) in step 2 has <ul style="list-style-type: none"> ○ Function field: 86h 	

	<ul style="list-style-type: none"> State in sub-function field: 11 Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	
3	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> an ACC-NR/SND-NR will be received within 1800 seconds for Mode C in step 3 <p>Otherwise the test is failed.</p>	2 times 900 seconds for receiving the first ACC-NR/SND-NR for Mode C.
5	<p>The test is successfully passed if</p> <ul style="list-style-type: none"> the received State response (see EN 13757-3:2018 Annex I, section I.2.12) in step 5 has <ul style="list-style-type: none"> Function field: 84h Sub function field with State: 12 or 15 Image identifier field: <i>UC05_IDENTIFIER</i> <p>Otherwise the test is failed.</p>	

4.7 Test Cases for UseCase 06 (UC-06) - [OMS-CT4.APL] Addition

4.7.1 Introduction

5 The Implementation of OMS UseCase 06 according [OMS-S2], Annex M is declared in the [OMS-CT-ManDec].

The usage of the datapoints MM2! or MM3! and optional MM8! are declared in the [OMS-CT-ManDec].

For successful conformity test all test criteria's of this chapter have to be passed.

Special Information on DUT required for UC06 [OMS-CT-ManDec] :

- 10
- Applied security profile according [OMS-S2], Annex M, Table M.23
 - Applied Encryption and Authentication [OMS-S2], Annex M, Table M.23

4.7.2 Standard Response

4.7.2.1 Introduction

The DUT shall reply with a standard response to a request after an ApplicationReset.

4.7.2.2 [T43-UC06-1] Test for Get Status Information

This test is mandatory.

Table 58 – [T43-UC06-1] Test for get status information

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered (enough credits shall be available)	
2	DUT is not in FAC.	
Test sequence		
1	The OMS CT Tool shall send the sequence “Seq_SND-UDx” ([OMS-S2], Annex M, table M.23) to the DUT using <ul style="list-style-type: none"> defined security profile as declared in [OMS-CT-ManDec] defined encryption and authentication as declared in [OMS-CT-ManDec] 	
2	The OMS CT Tool shall receive the answer from the DUT	
3	The test [T43-UC06-1] is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD (standard response) [OMS-S2], table 33 The received data contain error flag MM2! or MM3! as declared in the [OMS-CT-ManDec] The received data contain battery life time MM8! (optional) 	
4	The test sequence shall be executed 2 times without interruption	
Test result		
1	The Test [T43-UC06-1] is successfully passed if 2 of 2 test sequences have been successful. Otherwise the test [T43-UC06-1] is failed .	

4.7.2.3 [T43-UC06-2] Test for Clear Status Information Bitwise

This test is mandatory.

Table 59 – [T43-UC06-2] Test for clear status information bitwise

Index	Description	Remark
Precondition		
1	Credit Handling shall be not considered (min. XXX credits shall be available)	
2	DUT is not in FAC.	
3	A KeyCounter value 1000 is assumed as valid.	
Test sequence		
1	The OMS CT Tool shall prepare the command “Clear status information bitwise” ([OMS-S2], Annex M, table M.24) using <ul style="list-style-type: none"> defined security profile as declared in [OMS-CT-ManDec] defined encryption and authentication as declared in [OMS-CT-ManDec] defined application security parameters 	
2	The OMS CT Tool shall send the sequence “Seq_SND-UDx” ([OMS-S2] Annex M, table M.24) to the DUT using <ul style="list-style-type: none"> MB-Command: XMM2! or XMM3! 	
3	The OMS CT Tool shall receive the answer from the DUT.	
4	The test [T43-UC06-2] is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD (standard response) [OMS-S2], table 33 or SND-NR Dynamic Data [OMS-S2], table 29 The received data contain error flag MM2! or MM3!. 	
5	The test sequence shall be executed 2 times without interruption.	
Test result		
1	The Test [T43-UC06-2] is successfully passed if 2 of 2 test sequences have been successful. Otherwise the test [T43-UC06-2] is failed .	

4.7.2.4 [T43-UC06-3] Test for Clear Status Information all

This test is mandatory.

Table 60 – [T43-UC06-3] Test for clear status information all

Index	Description	Remark
Precondition		
1	Credit Handling shall be not considered (min. XXX credits shall be available)	
2	DUT is not in FAC.	
3	A KeyCounter value 1010 is assumed as valid.	
Test sequence		
1	The OMS CT Tool shall prepare the command “Clear status information all” ([OMS-S2], Annex M, table M.24) using <ul style="list-style-type: none"> defined security profile as declared in [OMS-CT-ManDec] defined encryption and authentication as declared in [OMS-CT-ManDec] defined application security parameters 	
2	The OMS CT Tool shall send the sequence “Seq_SND-UDx” ([OMS-S2] Annex M, table M.24) to the DUT using <ul style="list-style-type: none"> MB-Command: XMM4! 	
3	The OMS CT Tool shall receive the answer from the DUT.	
4	The test [T43-UC06-3] is successfully passed if the received answer is evaluated by <ul style="list-style-type: none"> telegram type is RSP-UD (standard response) [OMS-S2], table 33 The received data contain error flag MM2! or MM3!. 	
5	The test sequence shall be executed 2 times without interruption.	
Test result		
1	The Test [T43-UC06-3] is successfully passed if 2 of 2 test sequences have been successful. Otherwise the test [T43-UC06-3] is failed .	

4.8 Test Cases for UseCase 07 (UC-07)

Reserved for future revisions of this document.

4.9 Test Cases for UseCase 08 (UC-08) - [OMS-CT4.APL] Addition

4.9.1 Introduction

5 For successful conformity test all test criteria's of this chapter have to be passed.

Special Information on DUT required for UC08 [OMS-CT-ManDec] :

- Key ID 00h version 0
- Wrapper Key ID 12h
- If ASP10 supported (optional)
 - 10 ○ Key ID 1Fh
 - Wrapper Key ID 14h

4.9.2 Get List of Active Keys

The DUT shall replay a SITP response with a list of active key information.

4.9.2.1 [T43-UC08-1] Test for Active Key Information

This test is mandatory.

5

Table 61 – [T43-UC08-1] Test for active key information

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The index of the current active key has been determined from the last SND-NR sent by the DUT (either the initial master key V0 or Vn from the CT Tool) in accordance with the defined security profile as declared in [OMS-CT-ManDec]	
Test sequence		
1	The OMS CT Tool shall prepare the SITP command " Get list of active key information " ([OMS-S2], Annex M, table M.27) using <ul style="list-style-type: none"> BCF=08h, DSI=00h 	
2	The OMS CT Tool shall send the prepared command to the DUT	
3	The OMS CT Tool shall receive the answer from the DUT	
Test result		
1	<p>The Test is successfully passed if the received answer contains:</p> <ul style="list-style-type: none"> BCF=88h, DSI=21h The list shall contain at least: <ul style="list-style-type: none"> Master Key ID (00h) and version which must be in accordance with the precondition 2. Communication wrapper key ID (12h) and version. If ASP10 is supported as declared in [OMS-CT-ManDec], the list shall also contain: <ul style="list-style-type: none"> OMS compliance test key ID (1Fh) and version, Application wrapper key ID (14h) and version. <p>Otherwise, the test is failed</p>	

4.9.2.2 [T43-UC08-2] Test for Active Keys and Key Counter Information

This test is mandatory.

Table 62 – [T43-UC08-2] Test for active keys and key counter information

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The index of the current active master key has been determined from the last SND-NR sent by the DUT (either the initial master key V0 or Vn from the CT Tool) in accordance with the defined security profile as declared in [OMS-CT-ManDec]	
Test sequence		
1	The OMS CT Tool shall prepare the SITP command "Get list of active keys and key counter information" ([OMS-S2] Annex M, table M.27) using <ul style="list-style-type: none"> BCF=09h, DSI=00h 	
2	The OMS CT Tool shall send the prepared command to the DUT	
3	The OMS CT Tool shall receive the answer from the DUT	
Test result		
1	<p>The Test is successfully passed if the received answer contains:</p> <ul style="list-style-type: none"> BCF=89h, DSI=23h The list shall contain at least: <ul style="list-style-type: none"> Master Key ID (00h), version which must be in accordance with the precondition 2, and key counter. Communication wrapper key ID (12h), version and key counter. If ASP10 is supported as declared in [OMS-CT-ManDec], the list shall also contain: <ul style="list-style-type: none"> OMS compliance test key ID (1Fh), version and key counter. Application wrapper key ID (14h), version and key counter. <p>Otherwise, the test is failed</p>	

4.9.3 Transfer of Key Material

4.9.3.1 [T43-UC08-3] Test for Transfer of Key Material (Master Key)

This test is mandatory.

Table 63 – [T43-UC08-3] Test for transfer of key material (Master key)

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The index of the current active master key has been determined from the last SND-NR sent by the DUT (either the initial master key V0 or Vn from the CT Tool) in accordance with the defined security profile as declared in [OMS-CT-ManDec]	
3	The communication security wrapper key (Key-ID = 12h) and its related version shall be provided in the [OMS-CT-ManDec] according to ASP01 [OMS-S2]	
Test sequence		
1	The OMS CT Tool shall prepare the SITP command " Transfer security information " [OMS-S2] Annex M, table M.28 using <ul style="list-style-type: none"> • BCF=00h, DSI=01h • DSH1= 12h, Communication security wrapper key Id, • DSH2= Communication security wrapper key version, • Key ID= 00h (MK) • If current active version is Vn: <ul style="list-style-type: none"> ○ Key version= Vn+1, ○ Key= value from the CT Tool 	The key value provided by the CT Tool shall be different from the previous used key.
2	The OMS CT Tool shall send the prepared command to the DUT	
3	The OMS CT Tool shall receive the answer from the DUT	
Test result		
1	The Test is successfully passed if the received answer contains: <ul style="list-style-type: none"> • BCF=80h, DSI=22h • Status response = 00h (Success) Otherwise, the test is failed	

4.9.3.2 [T43-UC08-4] Test for Transfer of Key Material (Application Security Key)

This test is optional.

Table 64 – [T43-UC08-4] Test for transfer of key material (Application security key)

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The index of the current active master key has been determined from the last SND-NR sent by the DUT (either the initial master key V0 or Vn from the CT Tool) in accordance with the defined security profile as declared in [OMS-CT-ManDec]	
3	The application security wrapper key (Key-ID = 14h) and its related version shall be provided in the [OMS-CT-ManDec] according to ASP01 [OMS-S2]	
Test sequence		
1	<p>The OMS CT Tool shall prepare the SITP command “Transfert security information” ([OMS-S2] Annex M, table M.28) using</p> <ul style="list-style-type: none"> • BCF=00h, DSI=01h • DSH1= 14h, Application security wrapper key Id, • DSH2= Application security wrapper key version, • Key ID= 1Fh, Application security key, • If current active version is Vn: <ul style="list-style-type: none"> ○ Key version= Vn+1, ○ Key= value from the CT Tool 	<p>Current active key has been retrieved during the test of active key information [Txx-UC8-1]</p> <p>The key value provided by the CT Tool shall be different from the previous used key.</p>
2	The OMS CT Tool shall send the prepared command to the DUT	
3	The OMS CT Tool shall receive the answer from the DUT	
Test result		
1	<p>The Test is successfully passed if the received answer contains:</p> <ul style="list-style-type: none"> • BCF=80h, DSI=22h • Status response = 00h (Success) <p>Otherwise, the test is failed</p>	

4.9.4 Activation/Deactivation of Key Material

4.9.4.1 [T43-UC08-5] Test for Activation/Deactivation of Key Material (Master Key)

This test is mandatory.

5 **Table 65 – [T43-UC08-5] Test for activation/deactivation of key material (Master key)**

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The index of the current active master key has been determined from the last SND-NR sent by the DUT (either the initial master key V0 or Vn from the CT Tool) in accordance with the defined security profile as declared in [OMS-CT-ManDec]	
3	The communication security wrapper key (Key-ID = 12h) and its related version shall be provided in the [OMS-CT-ManDec] according to ASP01 [OMS-S2]	
Test sequence		
1	<p>The OMS CT Tool shall prepare the SITP command “Combined activation/deactivation of security information” ([OMS-S2], Annex M, table M.29) using</p> <ul style="list-style-type: none"> • BCF=04h, DSI=03h • DSH1= 12h, Communication security wrapper key Id, • DSH2= Communication security wrapper key version, • Activated Key ID= 00h (MK) • Deactivated Key ID= 00h (MK) • If current active version is Vn: <ul style="list-style-type: none"> ◦ Activated Key version= Vn+1, ◦ Deactivated Key version = Vn • Option = 1 to perform the message counter reset 	
2	The OMS CT Tool shall send the prepared command to the DUT with SND-UD	
3	OMS CT Tool shall load the new key after the ACK was received	
4	The OMS CT Tool shall send a REQ-UD2	
5	The OMS CT Tool shall receive the answer from the DUT	

Index	Description	Remark
Test result		
1	<p>The Test is successfully passed if the received answer is encrypted with the newly activated version and contains:</p> <ul style="list-style-type: none"> • Successful decryption • BCF=84h, DSI=22h • Status response = 00h (Success) • Message counter has to be reset to 1 <p>Otherwise, the test is failed</p>	

4.9.4.2 [T43-UC08-6] Test for Activation/Deactivation of Key Material (Application Security Key)

This test is optional.

Table 66 – [T43-UC08-6] Test for activation/deactivation of key material (Application security key)

5

Index	Description	Remark
Precondition		
1	Credit Handling shall not be considered therefore sufficient Credits shall be available	
2	The index of the current active master key has been determined from the last SND-NR sent by the DUT (either the initial master key V0 or Vn from the CT Tool) in accordance with the defined security profile as declared in [OMS-CT-ManDec]	
3	The application security wrapper key (Key-ID = 14h) and its related version shall be provided in the [OMS-CT-ManDec] according to ASP01 [OMS-S2]	
Test sequence		
1	<p>The OMS CT Tool shall prepare the SITP command "Combined activation/deactivation of security information" ([OMS-S2] Annex M, table M.29) using</p> <ul style="list-style-type: none"> • BCF=04h, DSI=03h • DSH1= 14h, Application security wrapper key Id, • DSH2= Application security wrapper key version, • Activated Key ID= 1Fh (Application security key) • Deactivated Key ID= 1Fh (Application security key) • If current active version is Vn: <ul style="list-style-type: none"> ○ Activated Key version= Vn+1, ○ Deactivated Key version = Vn 	
2	The OMS CT Tool shall send the prepared command to the DUT with SND-UD	
3	OMS CT Tool shall load the new key after the ACK was received	

Index	Description	Remark
4	The OMS CT Tool shall send a REQ-UD2	
5	The OMS CT Tool shall receive the answer from the DUT	
6	<p>If the received answer contains:</p> <ul style="list-style-type: none"> • Successful decryption • BCF=84h, DSI=22h • Status response = 00h (Success) • <p>Otherwise, the test is failed</p>	
7	The OMS-CT shall prepare "test response short command" [32h].	
8	The OMS-CT shall apply ASP10 to the command using KeyID = 1Fh [OMS-CT-ManDec]	
9	The OMS CT shall execute the [T43-UC00-1] successful.	
Test result		
1	<p>The test sequence is successfully passed if the received answer is evaluated by</p> <ul style="list-style-type: none"> • telegram type is RSP-UD <p>The received data is '42h 42h' ([OMS-S2], Annex M, Table M.4)</p>	

4.10 Test Cases for UseCase 12a (UC-12a) - [OMS-CT4.APL] Addition

4.10.1 Introduction

For a successful conformity test all test criteria's of this chapter have to be passed, if UseCase 12a is supported by the DUT.

The Implementation of OMS UseCase 12a according to [OMS-S2], Annex M is optional and will be tested if UseCase 12a is declared in the [OMS-CT-ManDec].

If not described in another way, all communication shall use the communication security according to [OMS-S2], Table 41.

4.10.2 [T60-UC12a-0] Test to get last due date

Table 67 – [T60-UC12a-0] Test to get last due date

Index	Description	Remark
Precondition		
1	DUT is not in FAC.	
Test sequence		
1	OMS CT Tool receives a datagram with bidi access enabled	
2	OMS CT Tool sends a SND-UDx with [MB-Command Tag: getDT2!D] to the DUT	
3	OMS CT Tool receives a RSP-UD from the DUT	
4	In case of an error the test sequences (step 1..3) shall be repeated once	
Test result		
1	The Test is successfully passed if <ul style="list-style-type: none">RSP-UD contains the MB-Data-Tag DT2!D Otherwise the test is failed .	

4.10.3 [T60-UC12a-1] Test to set next due date with valid date

Table 68 – [T60-UC12a-1] Test to set next due date with valid date

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60- UC12a-0] was passed	
Test sequence		
1	OMS CT Tool receives a datagram with bidi access enabled	
2	<p>The OMS CT Tool shall send Seq_SND-UDx with [MB-Command Tag] to the DUT:</p> <ul style="list-style-type: none"> the command “setDT2!N” with valid value: “31st January of the next year” with valid security 	<p>Using ASP10 with following parameters:</p> <ul style="list-style-type: none"> - BCF = 20h / A0h - PID = 01h - KeyID = 26h - TargetTime = 3000000000h
3	OMS CT Tool receives a RSP-UD from the DUT	
4	In case of an error the test sequences (step 1..3) shall be repeated once	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> RSP-UD contains the MB-Data-Tag DT2!N The DT2!N value shall be identical to the value sent in step 3. <p>Otherwise the test is failed.</p>	

4.10.4 [T60-UC12a-2] Test to set next due date with invalid date

Table 69 – [T60-UC12a-2] Test to set next due date with invalid date

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60- UC12a-1] was passed	
Test sequence		
1	OMS CT Tool receives a datagram with bidi access enabled	
2	<p>The OMS CT Tool shall send Seq_SND-UDx with [MB-Command Tag]:</p> <ul style="list-style-type: none"> the command “setDT2!N” with invalid value in the past: “31st December of the previous year” with valid security 	<p>Using ASP10 with following parameters:</p> <ul style="list-style-type: none"> - BCF = 20h / A0h - PID = 01h - KeyID = 26h - TargetTime = 3000000000h
3	OMS CT Tool receives a RSP-UD from the DUT	
4	In case of an error the test sequences (step 1..3) shall be repeated once	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> The DT2!N value shall be identical to the value sent in [T60-UC12a-1] <p>Otherwise the test is failed.</p>	

4.10.5 [T60-UC012a-3] Test to get next due date

Table 70 – [T60-UC12a-3] Test to get next due date

Index	Description	Remark
Precondition		
1	DUT is in FAC.	
2	[T60- UC12a-2] was passed	
Test sequence		
1	OMS CT Tool receives a datagram with bidi access enabled	
2	OMS CT Tool sends a SND-UDx with [MB-Command Tag: getDT2!N] to the DUT	
3	OMS CT Tool receives a RSP-UD from the DUT	
4	In case of an error the test sequences (step 1..3) shall be repeated once	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> RSP-UD contains the MB-Data-Tag DT2!N The DT2!N value shall be identical to the value sent in [T60-UC12a-1] <p>Otherwise the test is failed.</p>	

4.11 Test Cases for UseCase 12b (UC-12b) - [OMS-CT4.APL] Addition

4.11.1 Introduction

For a successful conformity test all test criteria's of this chapter have to be passed, if UseCase 12b is supported by the DUT.

The Implementation of OMS UseCase 12b according to [OMS-S2], Annex M is optional and will be tested if UseCase 12b is declared in the [OMS-CT-ManDec].

If not described in another way, all communication shall use the communication security according to [OMS-S2], Table 41.

4.11.2 [T60-UC12b-0] Test to get ownership number

Table 71 – [T60-UC12b-0] Test to get ownership number

Index	Description	Remark
Precondition		
1	DUT is not in FAC.	
Test sequence		
1	OMS CT Tool receives a datagram with bidi access enabled	
2	OMS CT Tool sends a SND-UDx with [MB-Command Tag: getID4!] to the DUT using encryption defined by the applied security profile of the DUT	
3	OMS CT Tool receives a RSP-UD from the DUT	
4	In case of an error the test sequences (step 1..3) shall be repeated once	
Test result		
1	The Test is successfully passed if <ul style="list-style-type: none">RSP-UD contains the MB-Data-Tag ID4! Otherwise the test is failed .	

4.11.3 [T60-UC12b-1] Test to set ownership number

Table 72 – [T60-UC12b-1] Test to set ownership number

Index	Description	Remark
Precondition		
1	DUT is not in FAC.	
2	[T60- UC12b-0] was passed	
3	DUT shall contain a valid ownership number consisting of different digits (e.g. ASCII: "ABCD1234", INT/BCD: "12345678" are valid, ASCII: "AAAAAAA", INT/BCD.: "1111111" are invalid)	
Test sequence		
1	Get ownership number of DUT (according to test case [T60-UC12b-0] Test to get ownership number)	
2	OMS CT Tool receives a datagram with bidi access enabled	
3	<p>The OMS CT Tool shall send Seq_SND-UDx with [MB-Command Tag] to the DUT:</p> <ul style="list-style-type: none"> the command "setID4!" the new ownership number shall apply the same data type as from step1 the new ownership number shall apply the same length as from step1 with value from step 1 in reverse order with valid security 	<p>Using ASP10 with following parameters:</p> <ul style="list-style-type: none"> BCF = 20h / A0h PID = 01h KeyID = 26h TargetTime = 3000000000h
4	OMS CT Tool receives a RSP-UD from the DUT	
5	In case of an error the test sequences (step 1..4) shall be repeated once	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> RSP-UD contains the MB-Data-Tag ID4! The ID4! value shall be identical to the value sent in step 3. <p>Otherwise the test is failed.</p>	

4.11.4 [T60-UC12b-2] Test to set ownership number with invalid value

Not Applicable.

4.12 Test Cases for UseCase 14 (UC-14) - [OMS-CT5.UC]

4.12.1 Introduction

For a successful conformity test all test criteria's of this chapter have to be passed.

Special Information on DUT required for UC14 [OMS-CT-ManDec]:

- 5 • Message Application Number
- Block Number
- At least one implemented data point and one unimplemented data point

If not described in another way, all communication shall use the ASP10 according to [OMS-S2],
Table 41 with the specified settings:

- 10 • BCF = 20h / A0h
- PID = 01h
- KeyID = 25h
- TargetTime = 3000000000h

4.12.2 [T1-UC14-0] Test to remove data-point from readout-list

Table 73 – [T1-UC14-0] Test to remove data-point from readout-list

Index	Description	Remark
Precondition		
1	[OMS-CT-ManDec] provides Message Application Number.	
2	[OMS-CT-ManDec] provides Block Number.	
3	[OMS-CT-ManDec] provides at least one data point.	
4	[OMS-CT-ManDec] provides key for ASP10.	
5	All previous communication sequences are finalized. The DUT is in FAC.	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx with [MBus-Cmd, MBus-Data] to the DUT:</p> <ul style="list-style-type: none"> with command tag "setMM6!" AND "drIXXX!" with XXX as the implemented data tag provided by [OMS-CT-ManDec] with application and block as provided by [OMS-CT-ManDec] with valid security 	
2	The OMS CT Tool receives a RSP-UD from the DUT.	
3	In case of an error the test sequences (step 1..2) shall be repeated once.	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> RSP-UD of step 2 contains all data points of the provided application and block except the one selected in step 1. <p>Otherwise the test is failed.</p>	

4.12.3 [T1-UC14-1] Test to add data point to readout-list

Table 74 – [T1-UC14-1] Test to add data point to readout-list

Index	Description	Remark
Precondition		
1	[T1- UC14-0] was passed.	
Test sequence		
1	<p>The OMS CT Tool shall send Seq_SND-UDx with [MBus-Cmd, MBus-Data] to the DUT:</p> <ul style="list-style-type: none"> • with command tag “setMM6!” AND “arlXXX!” • with XXX identical to [T1- UC14-0] step 1. • with application and block identical to [T1- UC14-0] step 1. • with valid security 	
2	The OMS CT Tool receives a RSP-UD from the DUT.	
3	In case of an error the test sequences (step 1..2) shall be repeated once.	
Test result		
1	<p>The Test is successfully passed if</p> <ul style="list-style-type: none"> • RSP-UD of step 2 contains the MB-Data-Tag selected in step 1. <p>Otherwise the test is failed.</p>	

4.12.4 [T1-UC14-2] Test to add and delete unimplemented data point to/from readout-list

Table 75 – [T1-UC14-2] Test to add and delete unimplemented data point to/from readout-list

Index	Description	Remark
Precondition		
1	[T1- UC14-1] was passed.	
Test sequence		
1	The OMS CT Tool shall send Seq_SND-UDx with [MBus-Cmd, MBus-Data] to the DUT: <ul style="list-style-type: none"> with command tag "setMM6!" AND "arlXXX!" with XXX as the unimplemented data tag provided by [OMS-CT-ManDec]. with application and block identical to [T1-UC14-0] step 1. with valid security 	
2	The OMS CT Tool receives a RSP-UD from the DUT.	
3	The OMS CT Tool shall send Seq_SND-UDx with [MBus-Cmd, MBus-Data] to the DUT: <ul style="list-style-type: none"> with command tag "setMM6!" AND "driXXX!" with XXX as the unimplemented data tag provided by [OMS-CT-ManDec]. with application and block identical to [T1-UC14-0] step 1. with valid security 	-
4	The OMS CT Tool receives a RSP-UD from the DUT.	
5	In case of an error the test sequences (step 1..4) shall be repeated once.	
Test result		
1	The Test is successfully passed if <ul style="list-style-type: none"> RSP-UD of step 2 and 4 are identical to RSP-UD of [T1- UC14-1] step 2. Otherwise the test is failed .	